


REVISIONS				
SYM	DESCRIPTION	PREPARED BY	DATE	APPROVED

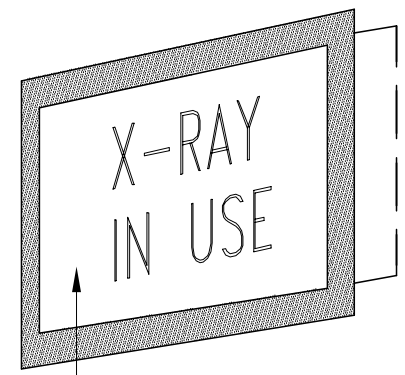


RED LETTERS ON WHITE BACKGROUND

1. FIXTURE SHALL HAVE ONE PIECE DIE CAST ALUMINUM HOUSING OF 3.17mm MINIMUM WALL THICKNESS AND NO EXTERNAL HARDWARE.
2. FIXTURE SHALL NOT HAVE LIGHT LEAKS BETWEEN SIGN PANEL AND FIXTURE HOUSING.
3. HOUSING SHALL HAVE BAKED MATTE BLACK ENAMEL FINISH.
4. THE ILLUMINATED PANEL SHALL BE INJECTION MOLDED TRANSLUCENT WHITE ACRYLIC WITH THE GRAPHIC SYMBOL IMPRINTED IN RED.
5. FIXTURE SHALL BE WALL MOUNTED ABOVE DOOR.


OPTIONS: PROVIDE BLINKER MOTOR

SURFACE FLUORESCENT SIGN
FIXTURE MARK: Y

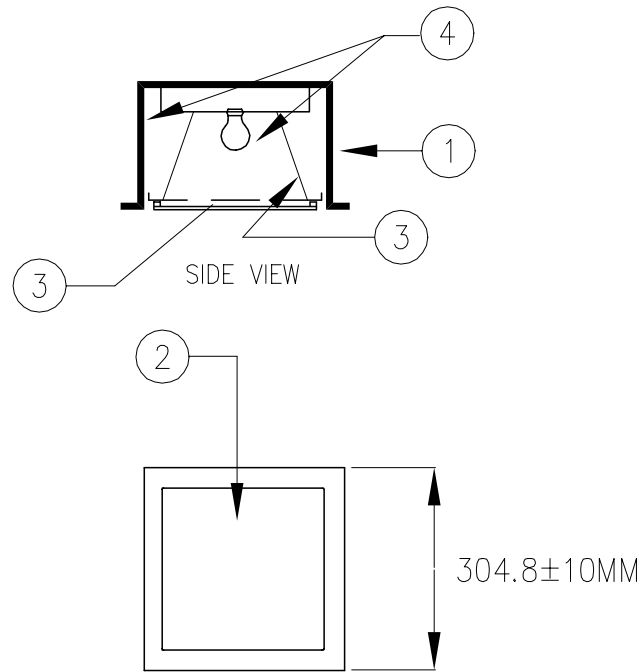

- ① **HOUSING:** COMPARTMENT 20 GAUGE COLD ROLLED STEEL WITH 20 GAUGE STAINLESS STEEL COVER.
- ② **DIFFUSER:** PRISMATIC GLASS
- ③ **REFLECTORS:** ALUMINUM FINISH
- ④ **SOCKET:** PORCELAIN


DARK ROOM SAFELIGHT
FIXTURE MARK: Y2

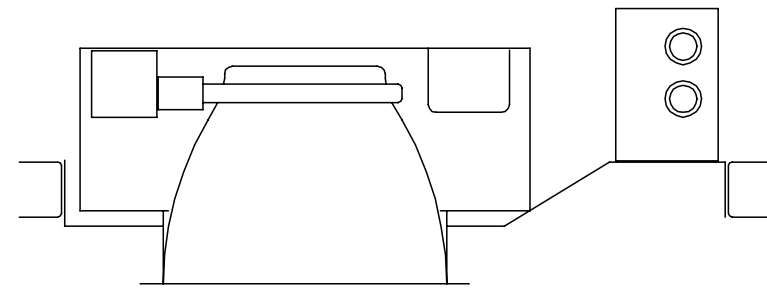

HOUSING: RUSTPROOF GALVANIZED STEEL OR ACRYLIC ENAMELED ALUMINUM. BUILT-IN PLASTER FRAME, DIECAST ALUMINUM. LUMINAIRE SERVICEABLE THROUGH FIXTURE OPENING - REMOVEABLE REFLECTOR. SUPPLIED WITH ADJUSTABLE HANGING BARS, BRACKETS AND HARDWARE REQUIRED FOR INSTALLATION IN APPROPRIATE CEILING TYPE.

REFLECTOR: CLEAR SPECULAR ANODIZED ALUMINUM REFLECTOR. SELF-FLANGED WITH LOW IRIDESCENCE SUITABLE FOR ALL LAMP TYPES.

TWIN TUBE ROUND DOWNLIGHT
FIXTURE MARK: SB, SBB

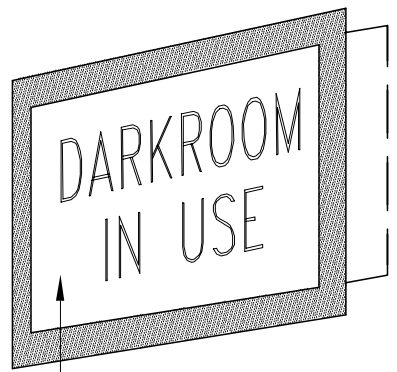


RED LETTERS ON WHITE BACKGROUND

1. FIXTURE SHALL HAVE ONE PIECE DIE CAST ALUMINUM HOUSING OF 3.17mm MINIMUM WALL THICKNESS AND NO EXTERNAL HARDWARE.
2. FIXTURE SHALL NOT HAVE LIGHT LEAKS BETWEEN SIGN PANEL AND FIXTURE HOUSING.
3. HOUSING SHALL HAVE BAKED MATTE BLACK ENAMEL FINISH.
4. THE ILLUMINATED PANEL SHALL BE INJECTION MOLDED TRANSLUCENT WHITE ACRYLIC WITH THE GRAPHIC SYMBOL IMPRINTED IN RED.
5. FIXTURE SHALL BE WALL MOUNTED ABOVE DOOR.


OPTION: PROVIDE BLINKER MOTOR

SURFACE FLUORESCENT SIGN
FIXTURE MARK: Y1

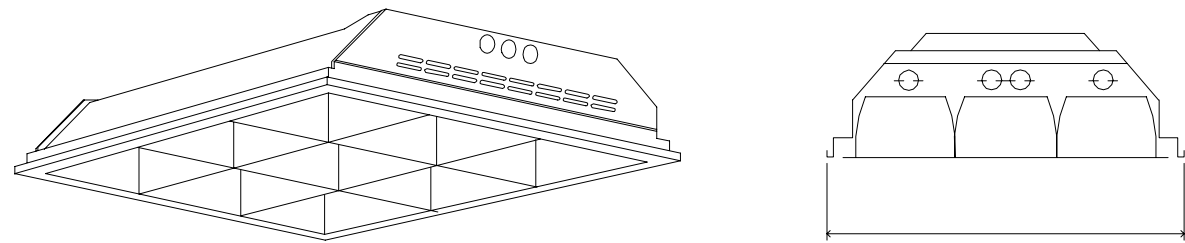

1. FIXTURE SHALL BE 610mm X 610mm, SUITABLE FOR SURFACE OR PENDANT MOUNTING, UNIT OR ROW INSTALLATION.
2. 76mm DEEP PARABOLIC ANODIZED ALUMINUM LOUVER, SEMI-SPECULAR SILVER FINISH, 3 X 3 CELLS. (9 CELL).
3. LOUVER SECURED BY STEEL T-HINGES AND SPRING-LOADED CAM LATCHES.
4. HOUSING OF DIE-FORMED GAGE STEEL WITH RUST RESISTANT PRIMER AND HIGH GLOSS WHITE BAKED ENAMEL FINISH.

RECESSED PARABOLIC LUMINAIRE
FIXTURE MARK: F3, F3B

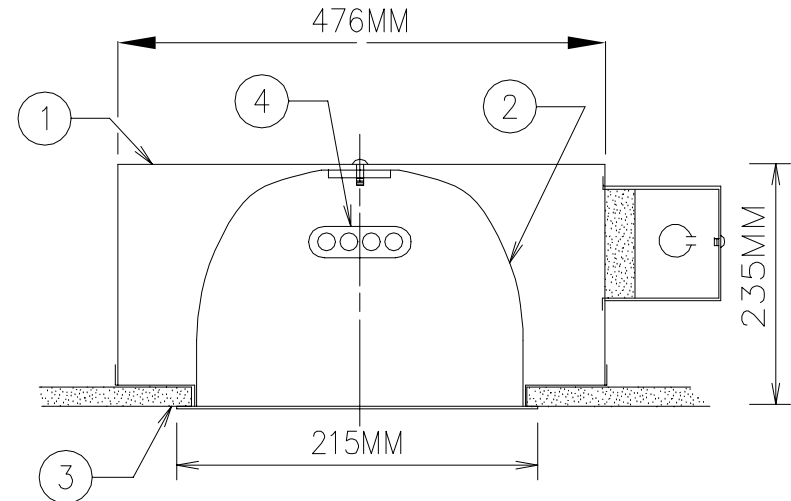

FIXTURE REQUIREMENTS

- ① **HOUSING:** ALUMINUM OR STEEL W/BAKED ENAMEL FINISH. 356MM WIDE PROVIDE INTERNAL GREEN GROUNDING SCREW.
- ② **REFLECTOR:** SPECULAR ALUMINUM.
- ③ **TRIM FLANGE:** ALUMINUM.
- ④ MINIMUM FIXTURE EFFICIENCY-80%.
- ⑤ FIXTURE SHALL BE UL LISTED.

TWIN TUBE ROUND DOWNLIGHT
FIXTURE MARK: SC, SCB

IF SHEET IS LESS THAN 28"x42", IT IS A REDUCED PRINT. SCALE REDUCED ACCORDINGLY.

EL4-3

MEDICAL/DENTAL CLINIC

LIGHTING DETAILS

SIZE	CODE IDENT. NO.	DRAWING NO.
F	XXXXX	8144777
SCALE:	AS SHOWN	SHEET 272 OF 316