



REVISIONS				
SYM	DESCRIPTION	PREPARED BY	DATE	APPROVED

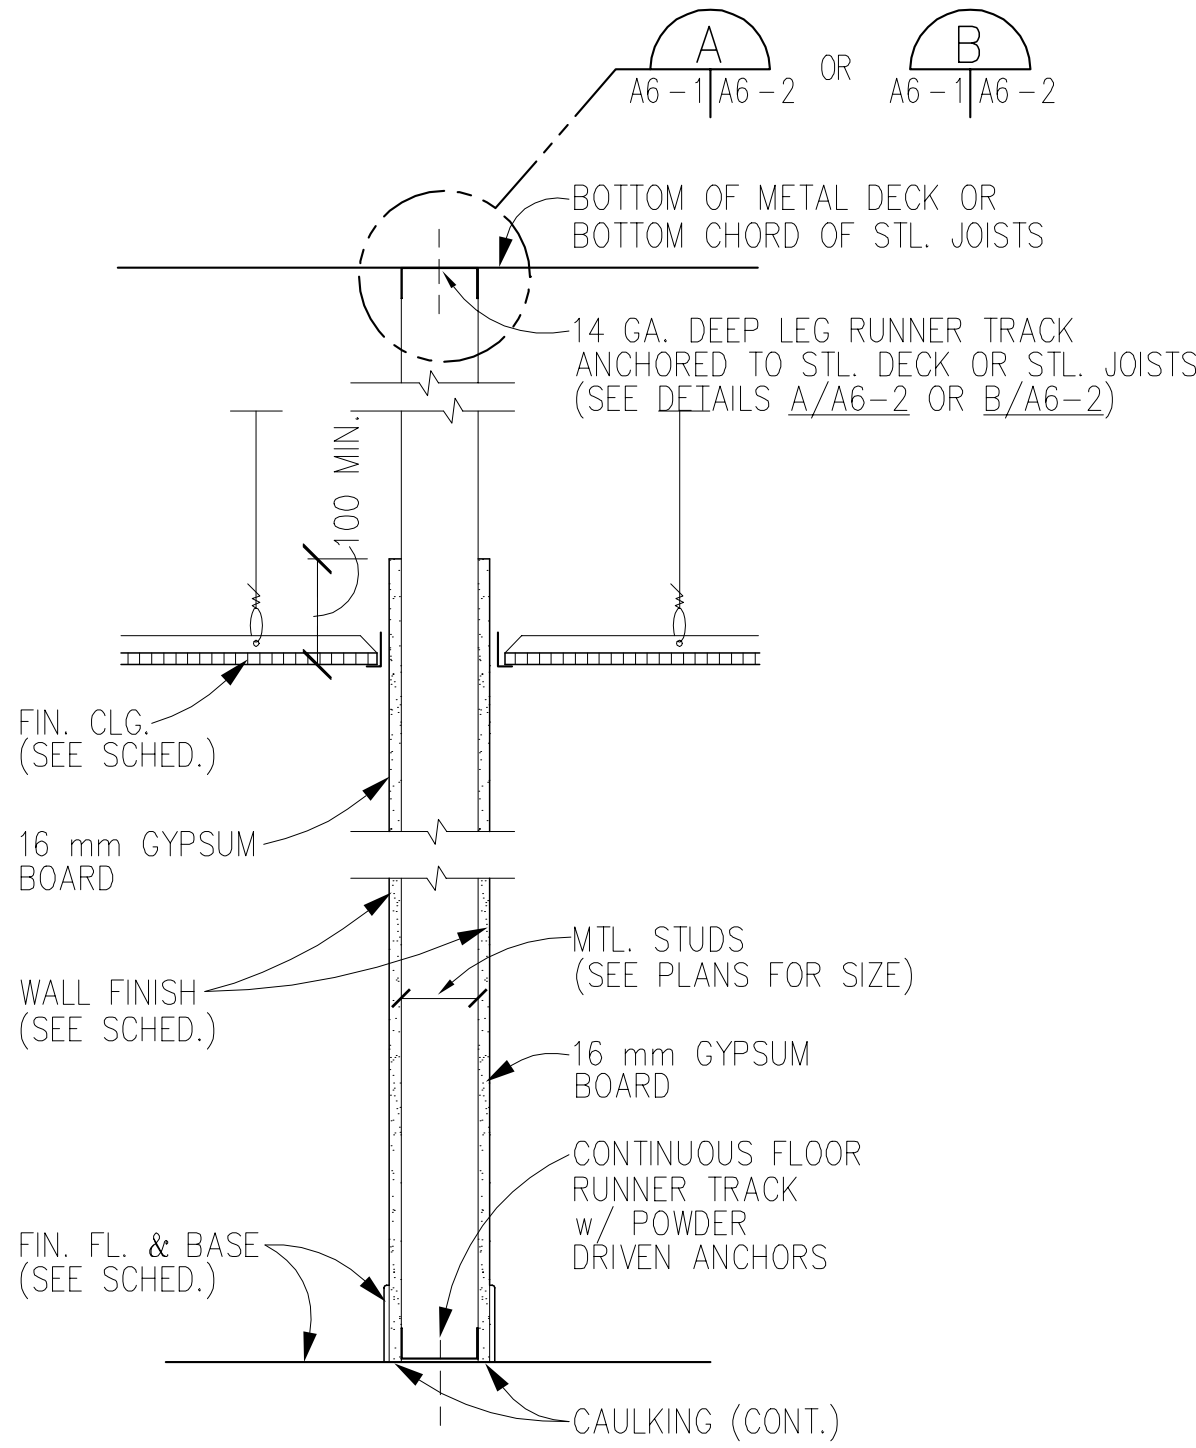

WALL TYPE	FIRE RATING N/A TEST: N/A	STC RATING 42 + TEST: NGC 2385	1
------------------	------------------------------	-----------------------------------	----------

WALL TYPE	ONE LAYER OF 16 mm GYPSUM BOARD ON ONE SIDE ONLY	STC RATING NA TEST: NA	1A
------------------	--	---------------------------	-----------

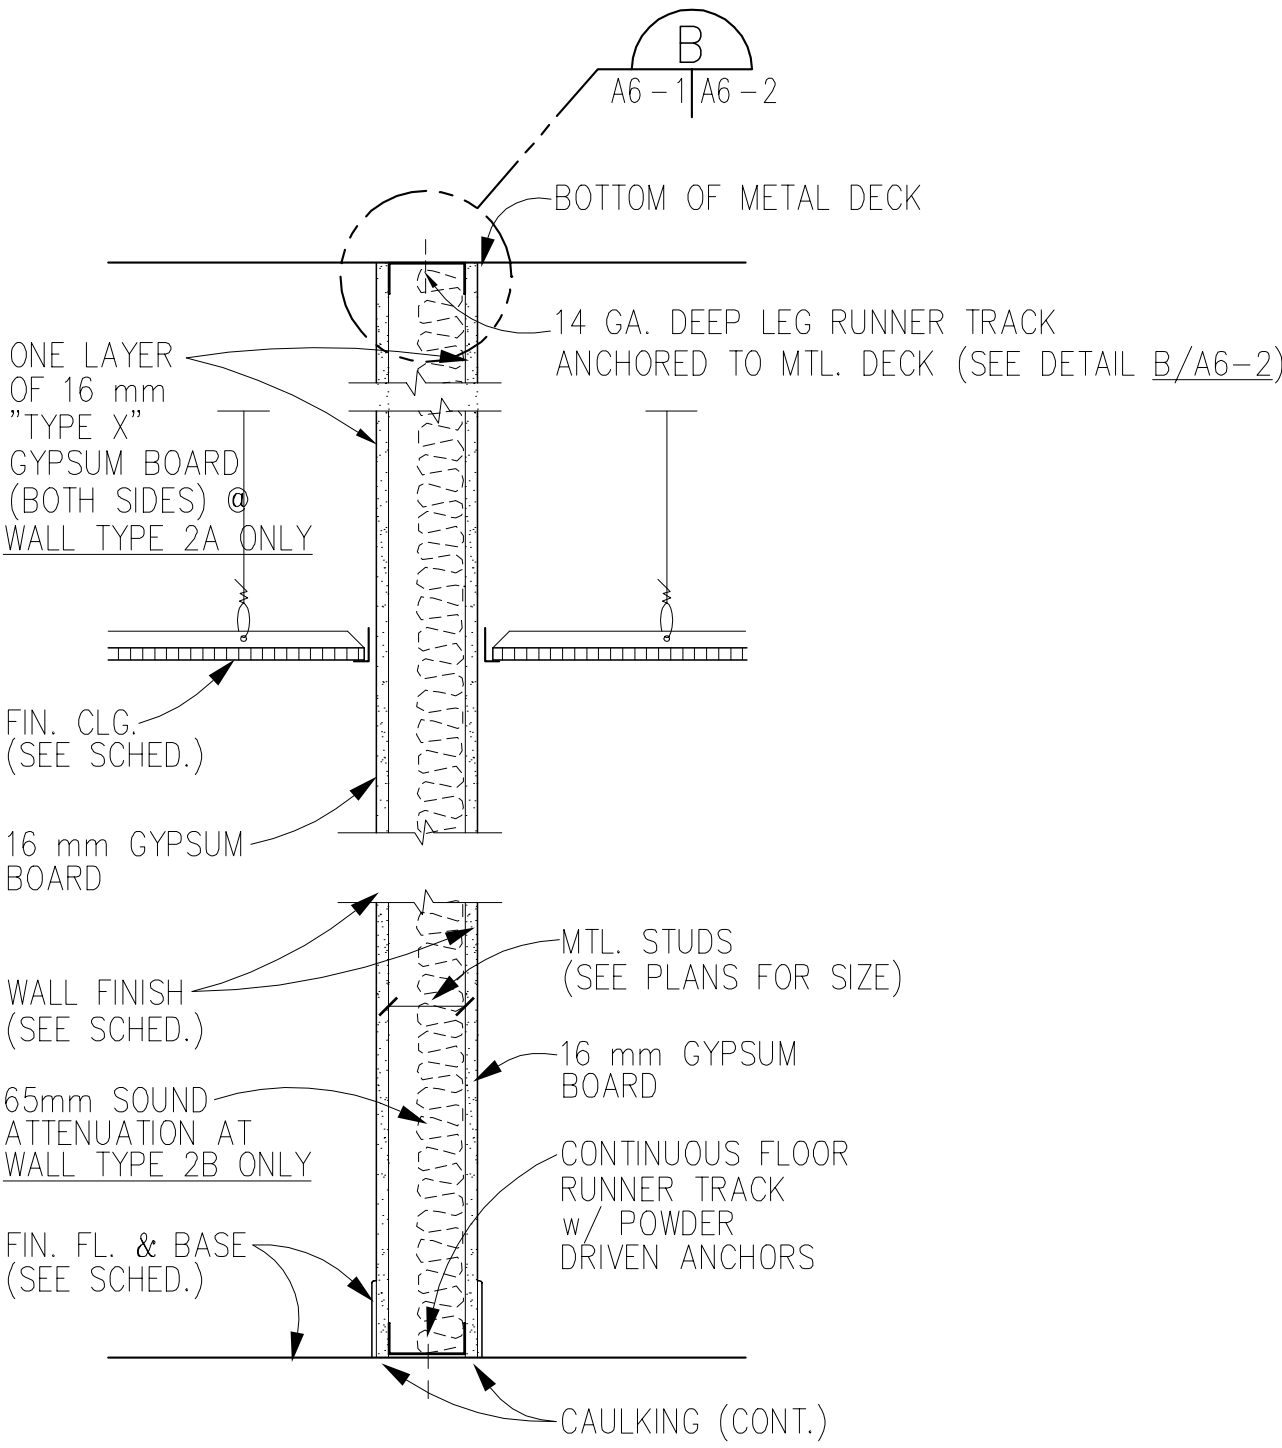


WALL TYPE	FIRE RATING N/A TEST: N/A	STC RATING 42 TEST: NGC 2385	2
------------------	------------------------------	---------------------------------	----------


WALL TYPE	FIRE RATING 1 HR. TEST: FM-W1A-1 HR.	STC RATING 42 TEST: NGC 2385	2A
------------------	---	---------------------------------	-----------

WALL TYPE	SAME AS WALL TYPE 2 EXCEPT W/ 65mm SOUND ATTENUATION BLANKET	STC RATING 47 TEST: NGC 2385	2B
------------------	--	---------------------------------	-----------

WALL TYPE	SAME AS WALL TYPE 2B EXCEPT ADD CONC. BASE AS SHOWN IN WALL TYPE 3	STC RATING 47 TEST: NGC 2385	2C
------------------	--	---------------------------------	-----------

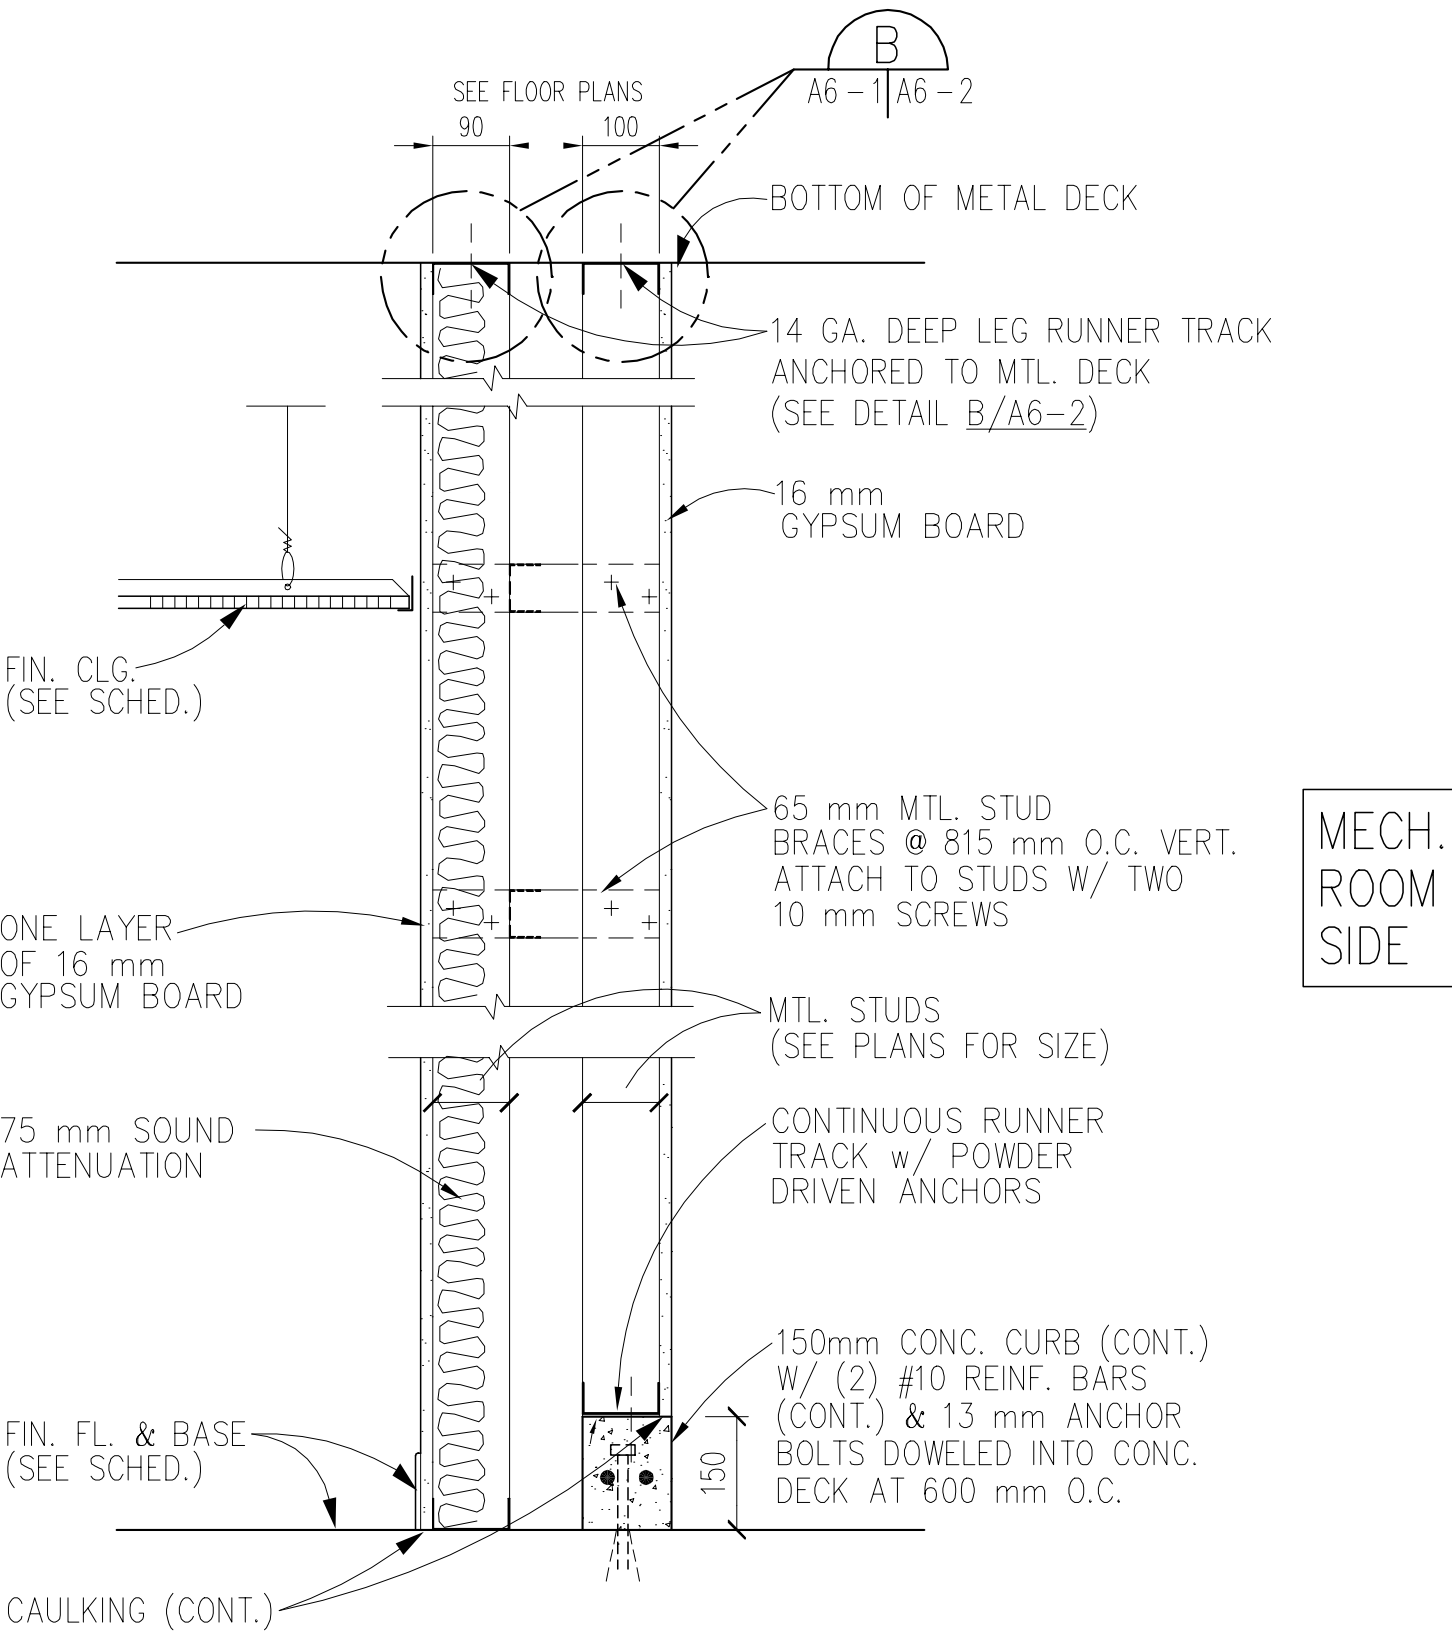


WALL TYPE	FIRE RATING N/A TEST: N/A	STC RATING 55 TEST: NGC 3022	3
------------------	------------------------------	---------------------------------	----------

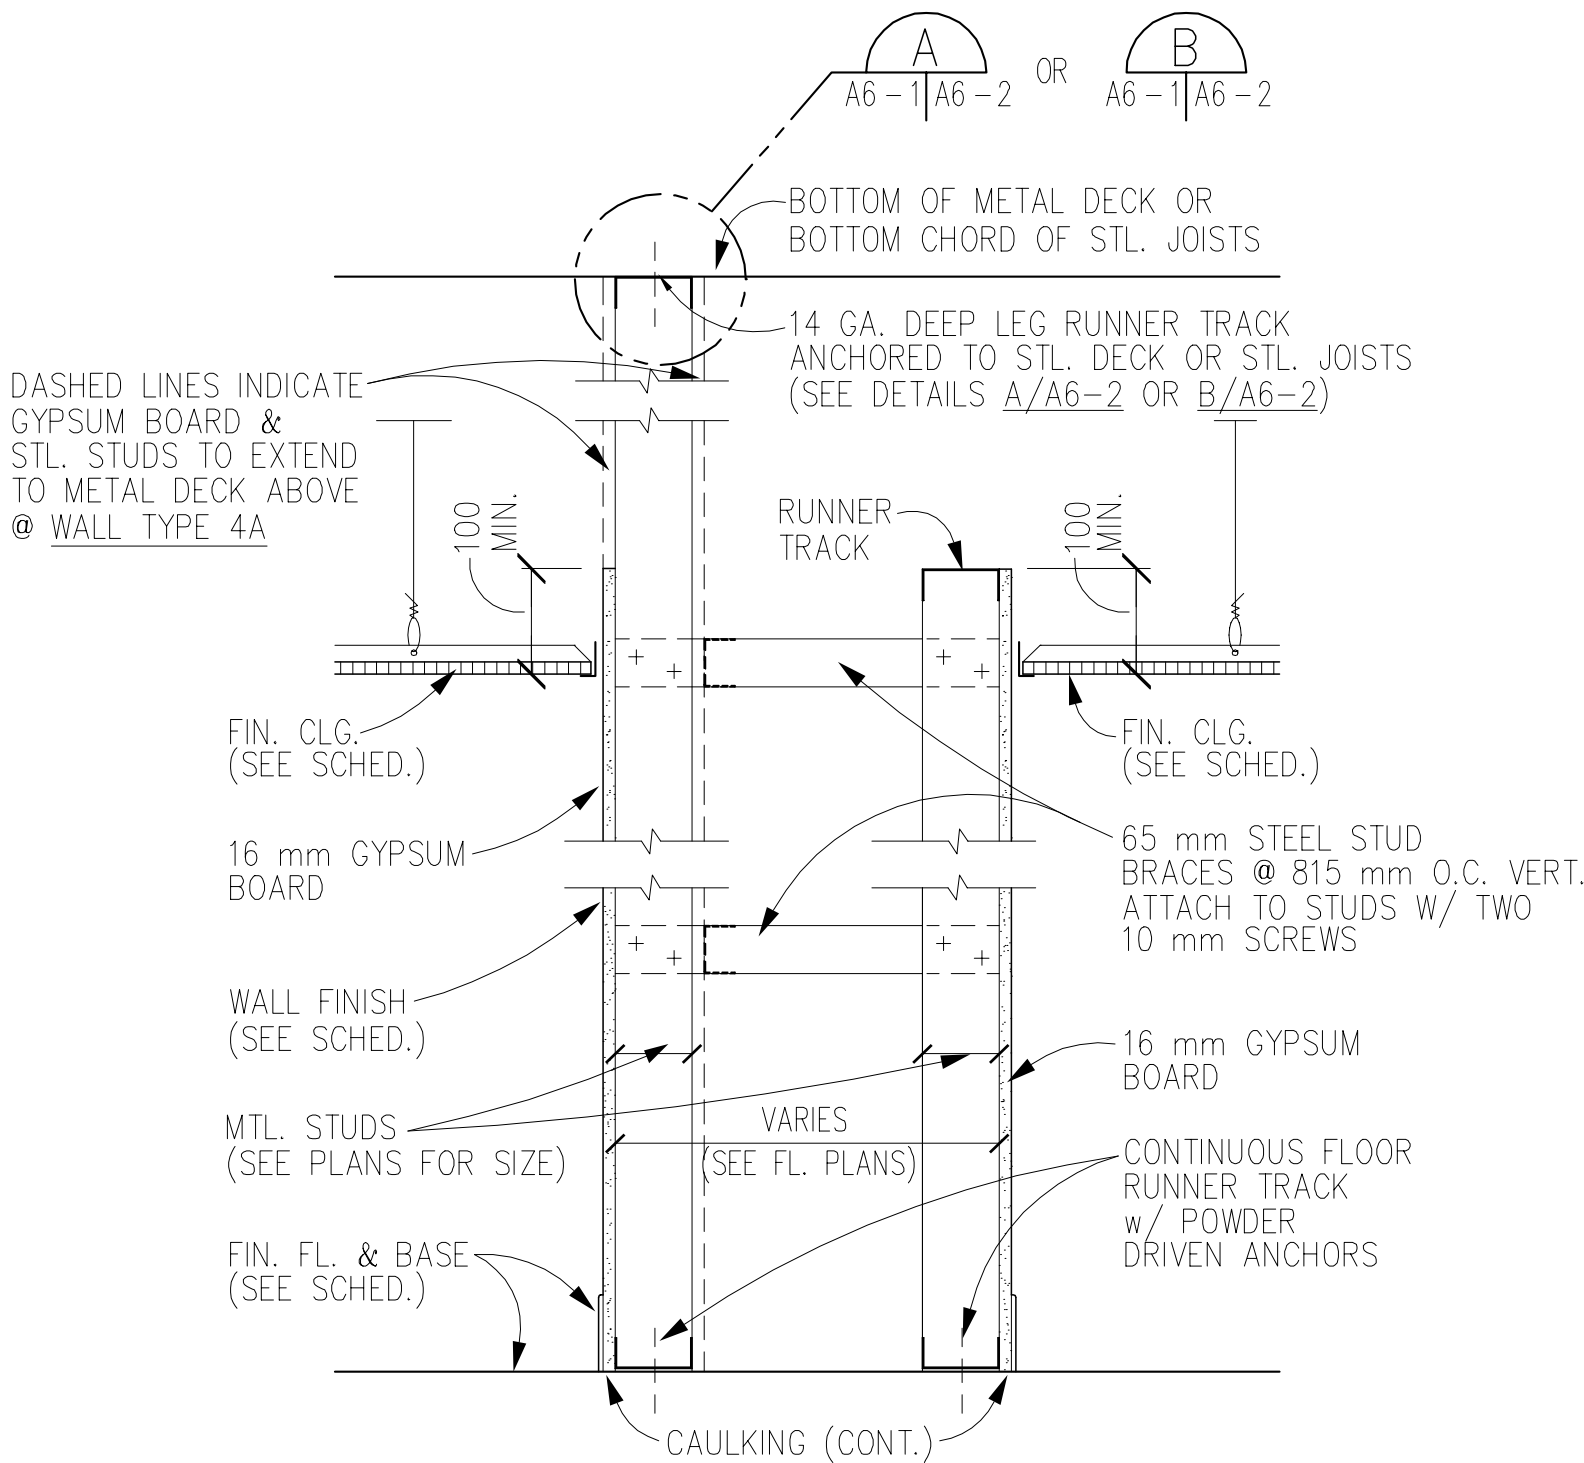


WALL TYPE	FIRE RATING N/A TEST: N/A	STC RATING N/A TEST: N/A	4
------------------	------------------------------	-----------------------------	----------

WALL TYPE	FIRE RATING N/A TEST: N/A	STC RATING N/A TEST: N/A	4A
------------------	------------------------------	-----------------------------	-----------

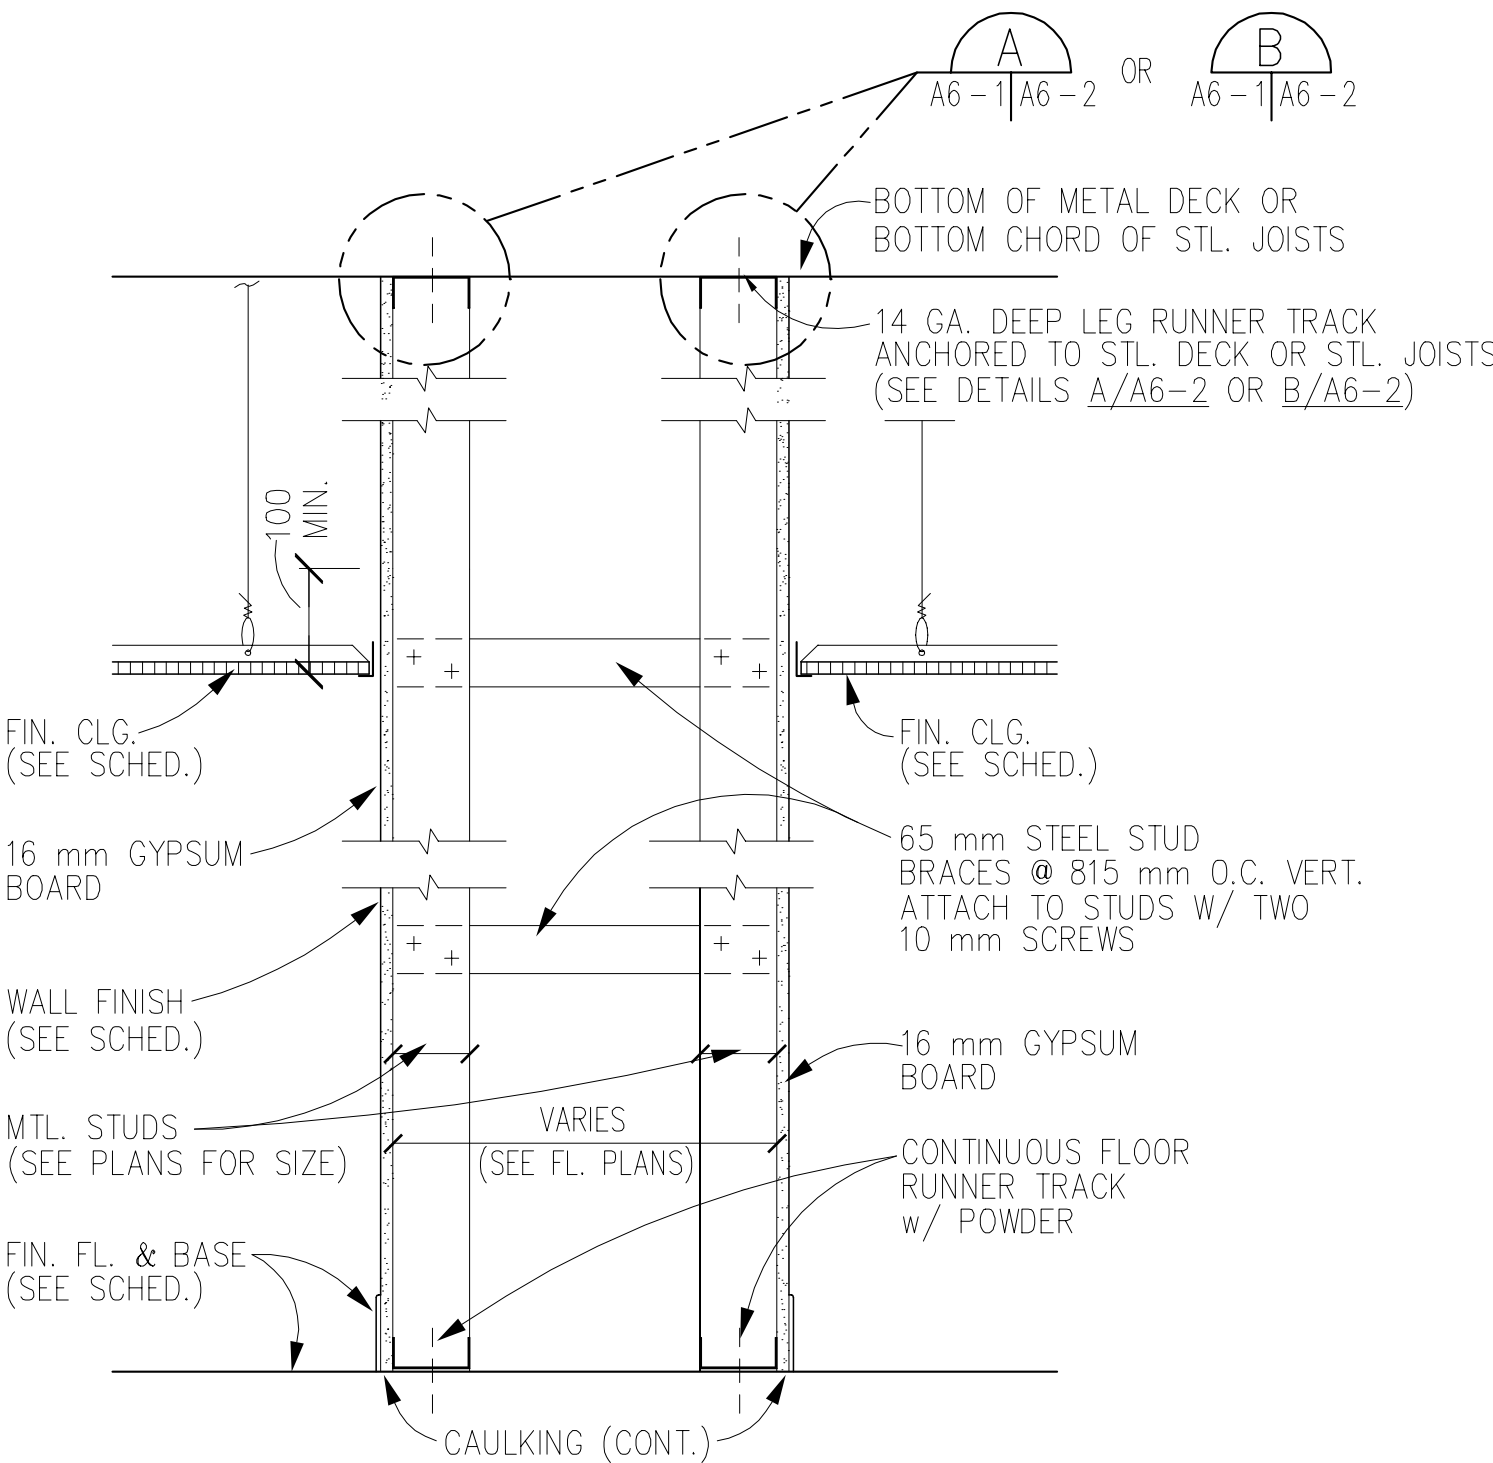

WALL TYPE	FIRE RATING N/A TEST: N/A	STC RATING N/A TEST: N/A	5
------------------	------------------------------	-----------------------------	----------

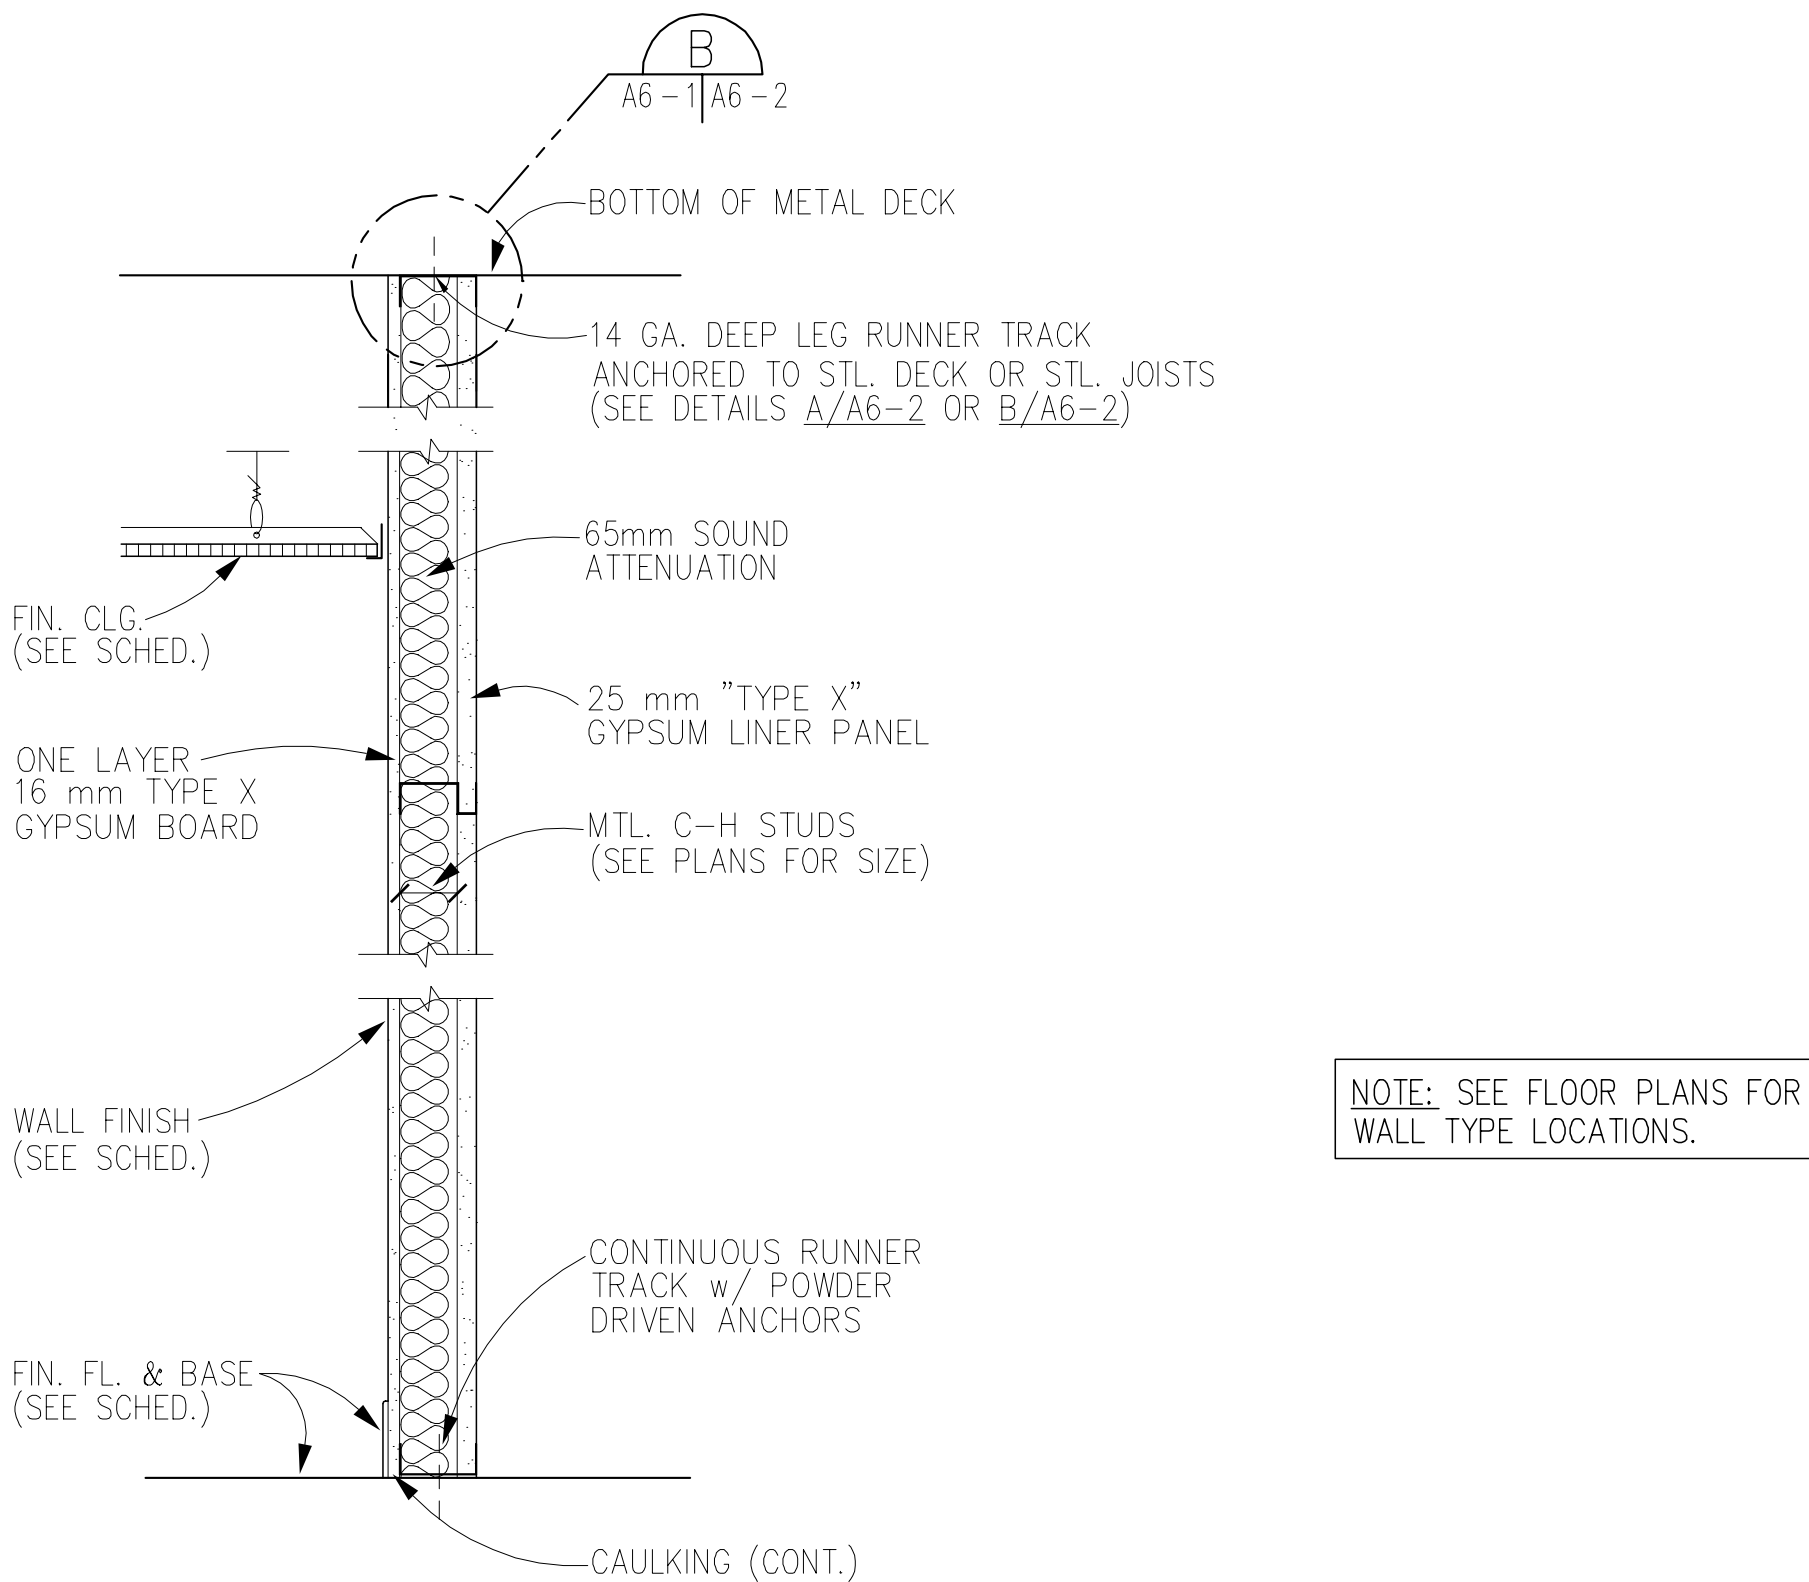

WALL TYPE	FIRE RATING 1 HRS. TEST: UL DESIGN U469	STC RATING 36 TEST: NGC 2617	6
------------------	--	---------------------------------	----------

GENERAL NOTE:

- REFER TO SHT. A6-2 FOR TYPICAL METAL STUD WALL FRAMING ELEVATIONS & DETAILS & TYPICAL ANCHORING INFORMATION.

ABBREVIATIONS


STC - SOUND TRANSMISSION CLASS
NGC - NATIONAL GYPSUM COMPANY
UL - UNDERWRITERS LABORATORY, INC.
N/A - NOT APPLICABLE

WALL TYPE GENERAL NOTES:

- ALL WALL TYPES ARE DRAWN @ 1:10 SCALE.
- FINISHES SHOWN ON WALL TYPES ARE NOT NECESSARILY THE FINISHES REQUIRED AT INDICATED LOCATIONS ON PLANS. THESE DETAILS ARE FOR THE BASIC CONSTRUCTION ONLY. CONTRACTOR SHALL USE FINISHES AS INDICATED ON FINISH SCHEDULE FOR VARIED CONDITIONS.
- WHERE MGT CERAMIC TILE IS SCHEDULED AS A WALL FINISH, THE TILE SHALL BE INSTALLED ON 13 mm CEMENTITIOUS BACKER BOARD.
- ALL ONE HOUR FIRE AND/OR SMOKE WALLS SHALL EXTEND TO UNDERSIDE OF STRUCTURAL SYSTEM ABOVE AND ANCHOR AS INDICATED. CAULK AND SEAL PROPERLY AROUND ALL DUCTS, PIPES, ETC. PENETRATING WALLS TO MAINTAIN INTEGRITY OF INDICATED RATING AND/OR THE REQUIRED SMOKE RESISTANCE. (USE U.L. APPROVED RATED FIRE CAULK)
- SEE DETAILS FOR WALL REINFORCING FOR GRAB BARS, CHAIR RAILS, BUMPERRAILS, CASEWORK, ETC. ON SHEETS A6-3, A6-4 & A13-1.
- WHERE LOC IS SCHEDULED IN TOILETS, "GNB" SHALL BE MOISTURE RESISTANT GYP. BOARD.
- CAULKING BEADS AT BOTTOM OF GYPSUM WALL BOARD SHALL BE MINIMUM 2 (TWO) CONTINUOUS BEADS EACH SIDE.
- PROVIDE ACOUSTICAL SEALANT AROUND PERIMETER OF ALL WALL PENETRATIONS BELOW HIGHEST CEILING ON EITHER SIDE OF WALL.
- FIRE RATING SHOWN ON THIS DRAWING INDICATES THE FIRE RESISTANCE CAPABILITY OF A PARTICULAR WALL CONSTRUCTION. THE ACTUAL LOCATION OF FIRE AND SMOKE PARTITIONS IS SHOWN BY FIRE & SMOKE SYMBOLS ON THE FLOOR PLANS.
- WHERE VIEW PANELS OR STOREFRONTS ARE INDICATED TO OCCUR IN PARTITIONS, PARTITION SHALL EXTEND ABOVE AND/OR BELOW STOREFRONT IN ACCORDANCE W/ PARTITION CONSTRUCTION SHOWN. SEE DRAWINGS FOR LOCATION AND DETAIL OF STOREFRONTS & VIEW PANELS.
- EXIT ENCLOSURES AND FIRE WALLS (SEE NOTE 10) SHALL BE EFFECTIVELY AND PERMANENTLY IDENTIFIED WITH STENCILING IN 50 mm H. LETTERS APPROVED BY THE ARCHITECT. IDENTIFICATION SHALL BE ABOVE THE FINISHED CEILING IN SPACES VISIBLE TO THE EYE. SUGGESTED WORDING:
"1 HR. FIRE WALL"
"PROTECT ALL OPENINGS."
SPACING AT 1830 mm O.C. OR AS DIRECTED BY THE CONTRACTING OFFICER.

IF SHEET IS LESS THAN 28"x42", IT IS A REDUCED PRINT. SCALE REDUCED ACCORDINGLY.

A6-1



MEDICAL/DENTAL CLINIC			
WALL TYPES			
SIZE	CODE IDENT. NO.	DRAWING NO.	
F	XXXXX	8144591	
SCALE	AS SHOWN	SPEC. 11996048	SHEET 86 OF 316