




Catalog Number	
Notes	Type

Indoor Decorative Litepuff

Linear Flush Mount

Linear T8 Fluorescent

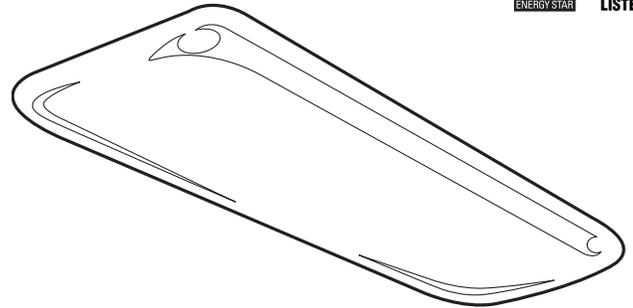

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

ATTRIBUTES

Decorative contoured linear design complements a variety of decors. Durable, milk white acrylic diffuser provides wide spread, uniform illumination and allows easy access for cleaning and maintenance. Available in four sizes: 1'x4', 1-1/2'x2', 2'x2', or 1-1/2'x4'.

Utilizes (2) or (4) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with electronic ballast (120 volt, 60 Hz) ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

LISTING

CUL listed (standard) suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

WARRANTY


Guaranteed for two years against mechanical defects in manufacture.

DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1' x 4'		10640	(2) 32W Linear T8	11-1/4" (28.6)	51-1/2" (130.8)	5-1/2" (14.0)
1-1/2' x 2'		10641	(4) 17W Linear T8	16-5/8" (42.2)	27-1/2" (69.5)	5-1/2" (14.0)
2' x 2'		10651	(2) 31W Linear T8 <i>U31 or U316</i>	27" (68.6)	27-3/8" (69.5)	5-1/2" (14.0)
1-1/2' x 4'		10642	(4) 32W Linear T8	16-5/8" (42.2)	51-1/2" (130.8)	5-1/2" (14.0)

* Extension from ceiling

All dimensions are in inches (centimeters)

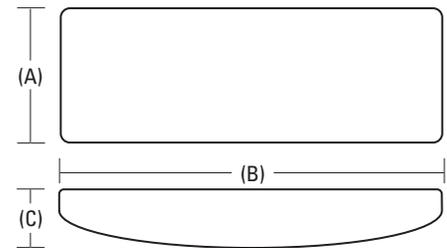

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Example: **10640 32 MVOLT GEB**

Model Number ^{1,2}	Residential Ballast ⁴	Ballast/Voltage ⁷	Options
10640 1'x4' (2) 32W Linear T8 fluorescent lamps	RE 120 volt residential electronic ballast (standard)	(blank) RE ballast fixtures only	GEB Electronic ballast, <20%THD
10641 1-1/2'x2' (4) 17W Linear T8 fluorescent lamps	(blank) Other voltage and ballast types available (see ballast/voltage)	MVOLT Multi-volt	GEB10IS T8 electronic ballast, <10% THD, instant start
10651 2'x2' (2) 31W T8 fluorescent U lamps ³		120 120 volt	GEB10RS T8 electronic ballast, 10% THD, rapid start
10642 1-1/2'x4' (4) 32W Linear T8 fluorescent lamps		277 277 volt	CSA CSA Certified ⁸
		347 347 volt	
		Others available: consult factory	Consult factory for other options and accessories
	Lamp⁵		
	(blank) RE ballast fixtures only		
	Non-RE ballast fixtures only		
	17 17W T8 (2' fixtures only)		
	U31 31W T8 (1-5/8" leg) ⁶		
	U316 31W T8 (6" leg) ⁶		
	32 32W T8 (4' fixtures only)		
Accessories/Replacement parts			
DPUFF 1' x 4' white acrylic diffuser			
D15PUFF2 1-1/2' x 2' white acrylic diffuser			
D2PUFF2 2' x 2' white acrylic diffuser			
D15PUFF 1-1/2' x 4' white acrylic diffuser			

Notes:

- Lamps not included.
- Use with non-dimmable switches only.
- Lamp configuration for RE fixtures is standard U316.
- Residential electronic ballast standard and requires RE designation.
- No designation for lamp type is required on RE ballast fixtures.
- Only available with 2'x2' fixtures (Also can be ordered on RE ballast 2x2 fixtures).
- No designation for ballast/voltage type is required on RE ballast fixtures.
- CSA standard on RE ballast fixtures.

Litepuff Linear Flush Mount

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.



Consumer Products

One Lithonia Way, Conyers, GA 30012

Phone: 800-748-5070 Fax: 770-860-3903

In Canada: 160 Avenue Labrosse, Point-Claire, P.Q., H9R 1A1

www.lightahome.com