

REVISIONS				
SYM	DESCRIPTION	PREPARED BY	DATE	APPROVED

PUBLIC ADDRESS SYSTEM:


1. ALL SPEAKER LEVEL CABLE SHALL BE INSTALLED IN CONDUIT OR CABLE TRAY.
ALL MICROPHONE AND LINE LEVEL CIRCUITS SHALL BE INSTALLED IN CONDUITS ONLY.

2. MOUNTING HEIGHTS OF PUBLIC ADDRESS SYSTEM DEVICES ABOVE FINISHED FLOOR SHALL BE AS FOLLOWS (MOUNTING HEIGHTS ARE TO CENTERLINE OF DEVICE, EXCEPT WHERE NOTED).

VOLUME CONTROL.....1220mm
TELEPHONE INTERFACE.....1525mm
TERMINAL CABINET.....1525mm
WALL SPEAKER.....2440mm

3. ALL CONDUIT TO BE 16mm MINIMUM.

4. ALL TERMINAL CABINETS SHALL BE STEEL, NEMA 1, STEEL, HINGED DOOR, WITH FIRE PROOF PAINTED WOOD BACKBOARD AND BARRIER TYPE TERMINAL STRIPS.

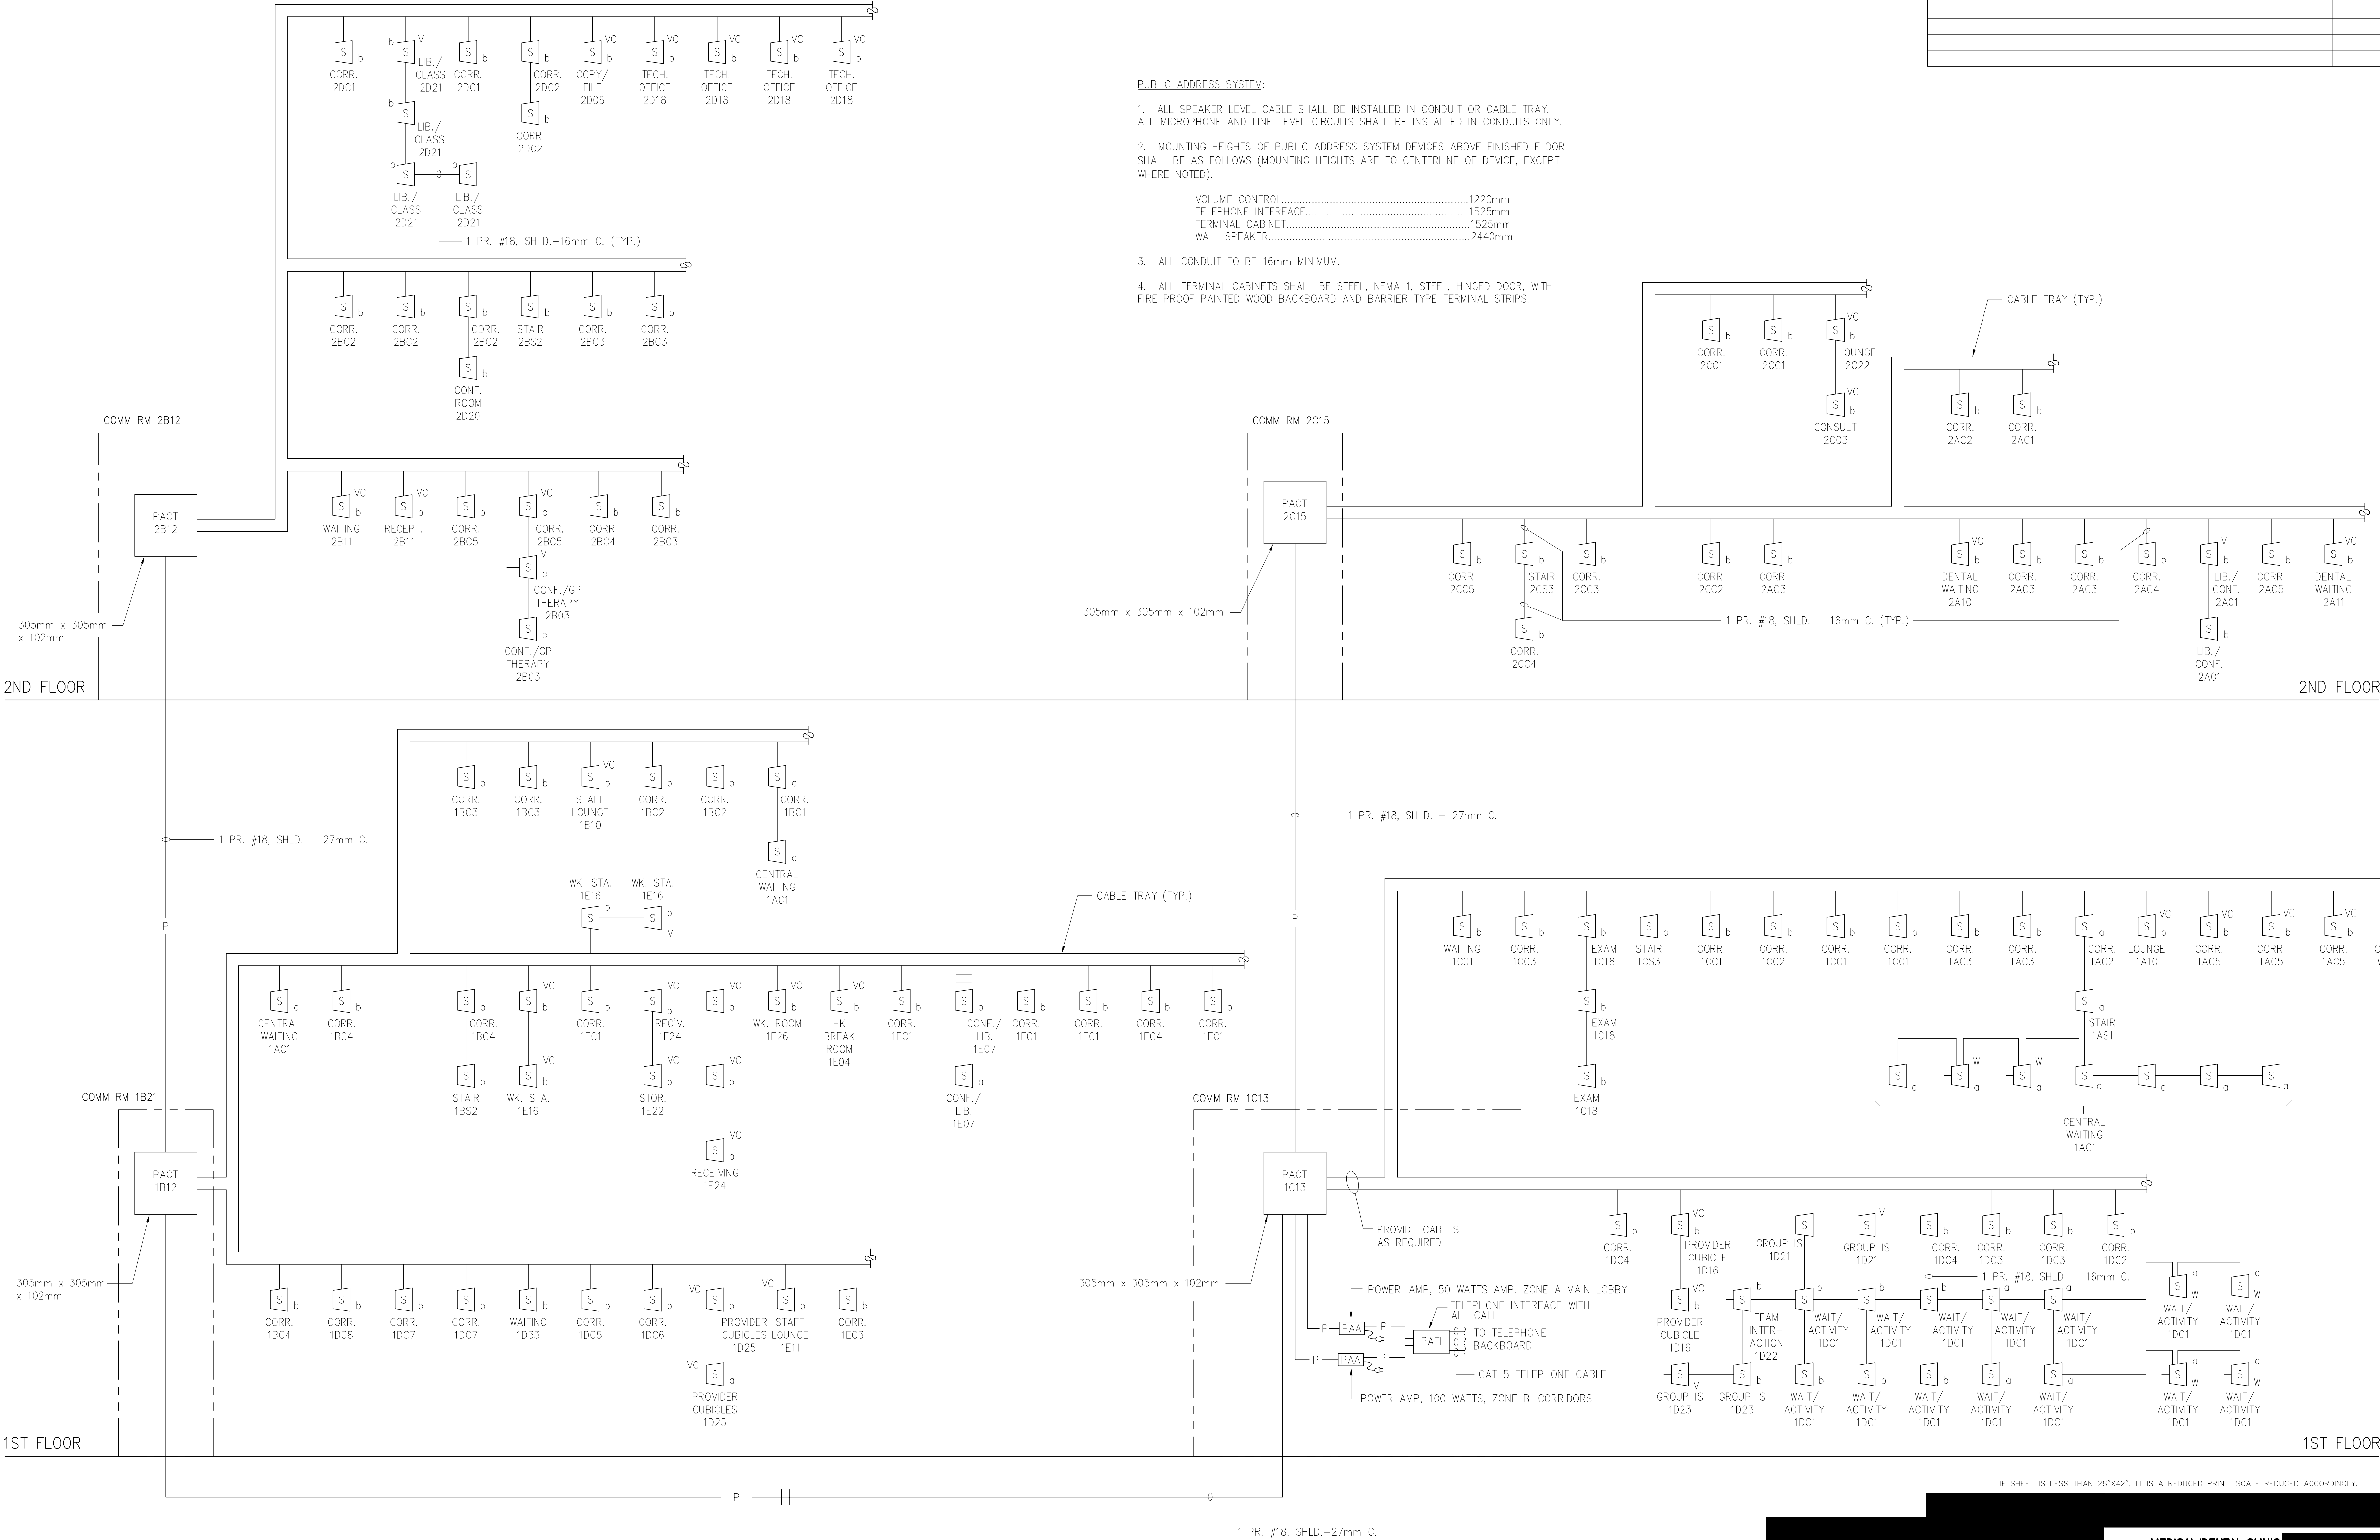

PAGING SYSTEM
SINGLE LINE DIAGRAM
NO SCALE

IF SHEET IS LESS THAN 28"x42", IT IS A REDUCED PRINT. SCALE: REDUCED ACCORDINGLY.

EC7-1

MEDICAL/DENTAL CLINIC			
PAGING SYSTEM – SINGLE LINE DIAGRAM			
SIZE	CODE IDENT. NO.	DRAWING NO.	8144815
F	XXXXX	CONST. CONTR. NO.	
SCALE:	AS SHOWN	SPEC.	11996048
		SHEET 310 OF 316	