


REVISIONS				
SYM	DESCRIPTION	PREPARED BY	DATE	APPROVED



WALL TYPE FIRE RATING N/A TEST: N/A STC RATING 44 + TEST: NGC 2283
* HEIGHT OF FINISHED PARTITION ONLY


7

WALL TYPE SAME AS ABOVE EXCEPT PARTITION STOPS AT 2135 mm A.F.F. (SEE DTL. 3/A14-1)

7A

WALL TYPE SAME AS WALL TYPE 7 EXCEPT GYP. BD. ON BOTH SIDES TO EXTEND TO METAL DECK ABOVE


7B



TYPICAL METAL STUD WALL FRAMING ELEVATION

NOT TO SCALE

TYP. 1 A6-2




TYPICAL DETAIL

SCALE: 1:5

TYP. A A6-1 A6-2 A6-2

ABBREVIATIONS

STC - SOUND TRANSMISSION CLASS
NGC - NATIONAL GYPSUM COMPANY
UL - UNDERWRITERS LABORATORY, INC.
N/A - NOT APPLICABLE

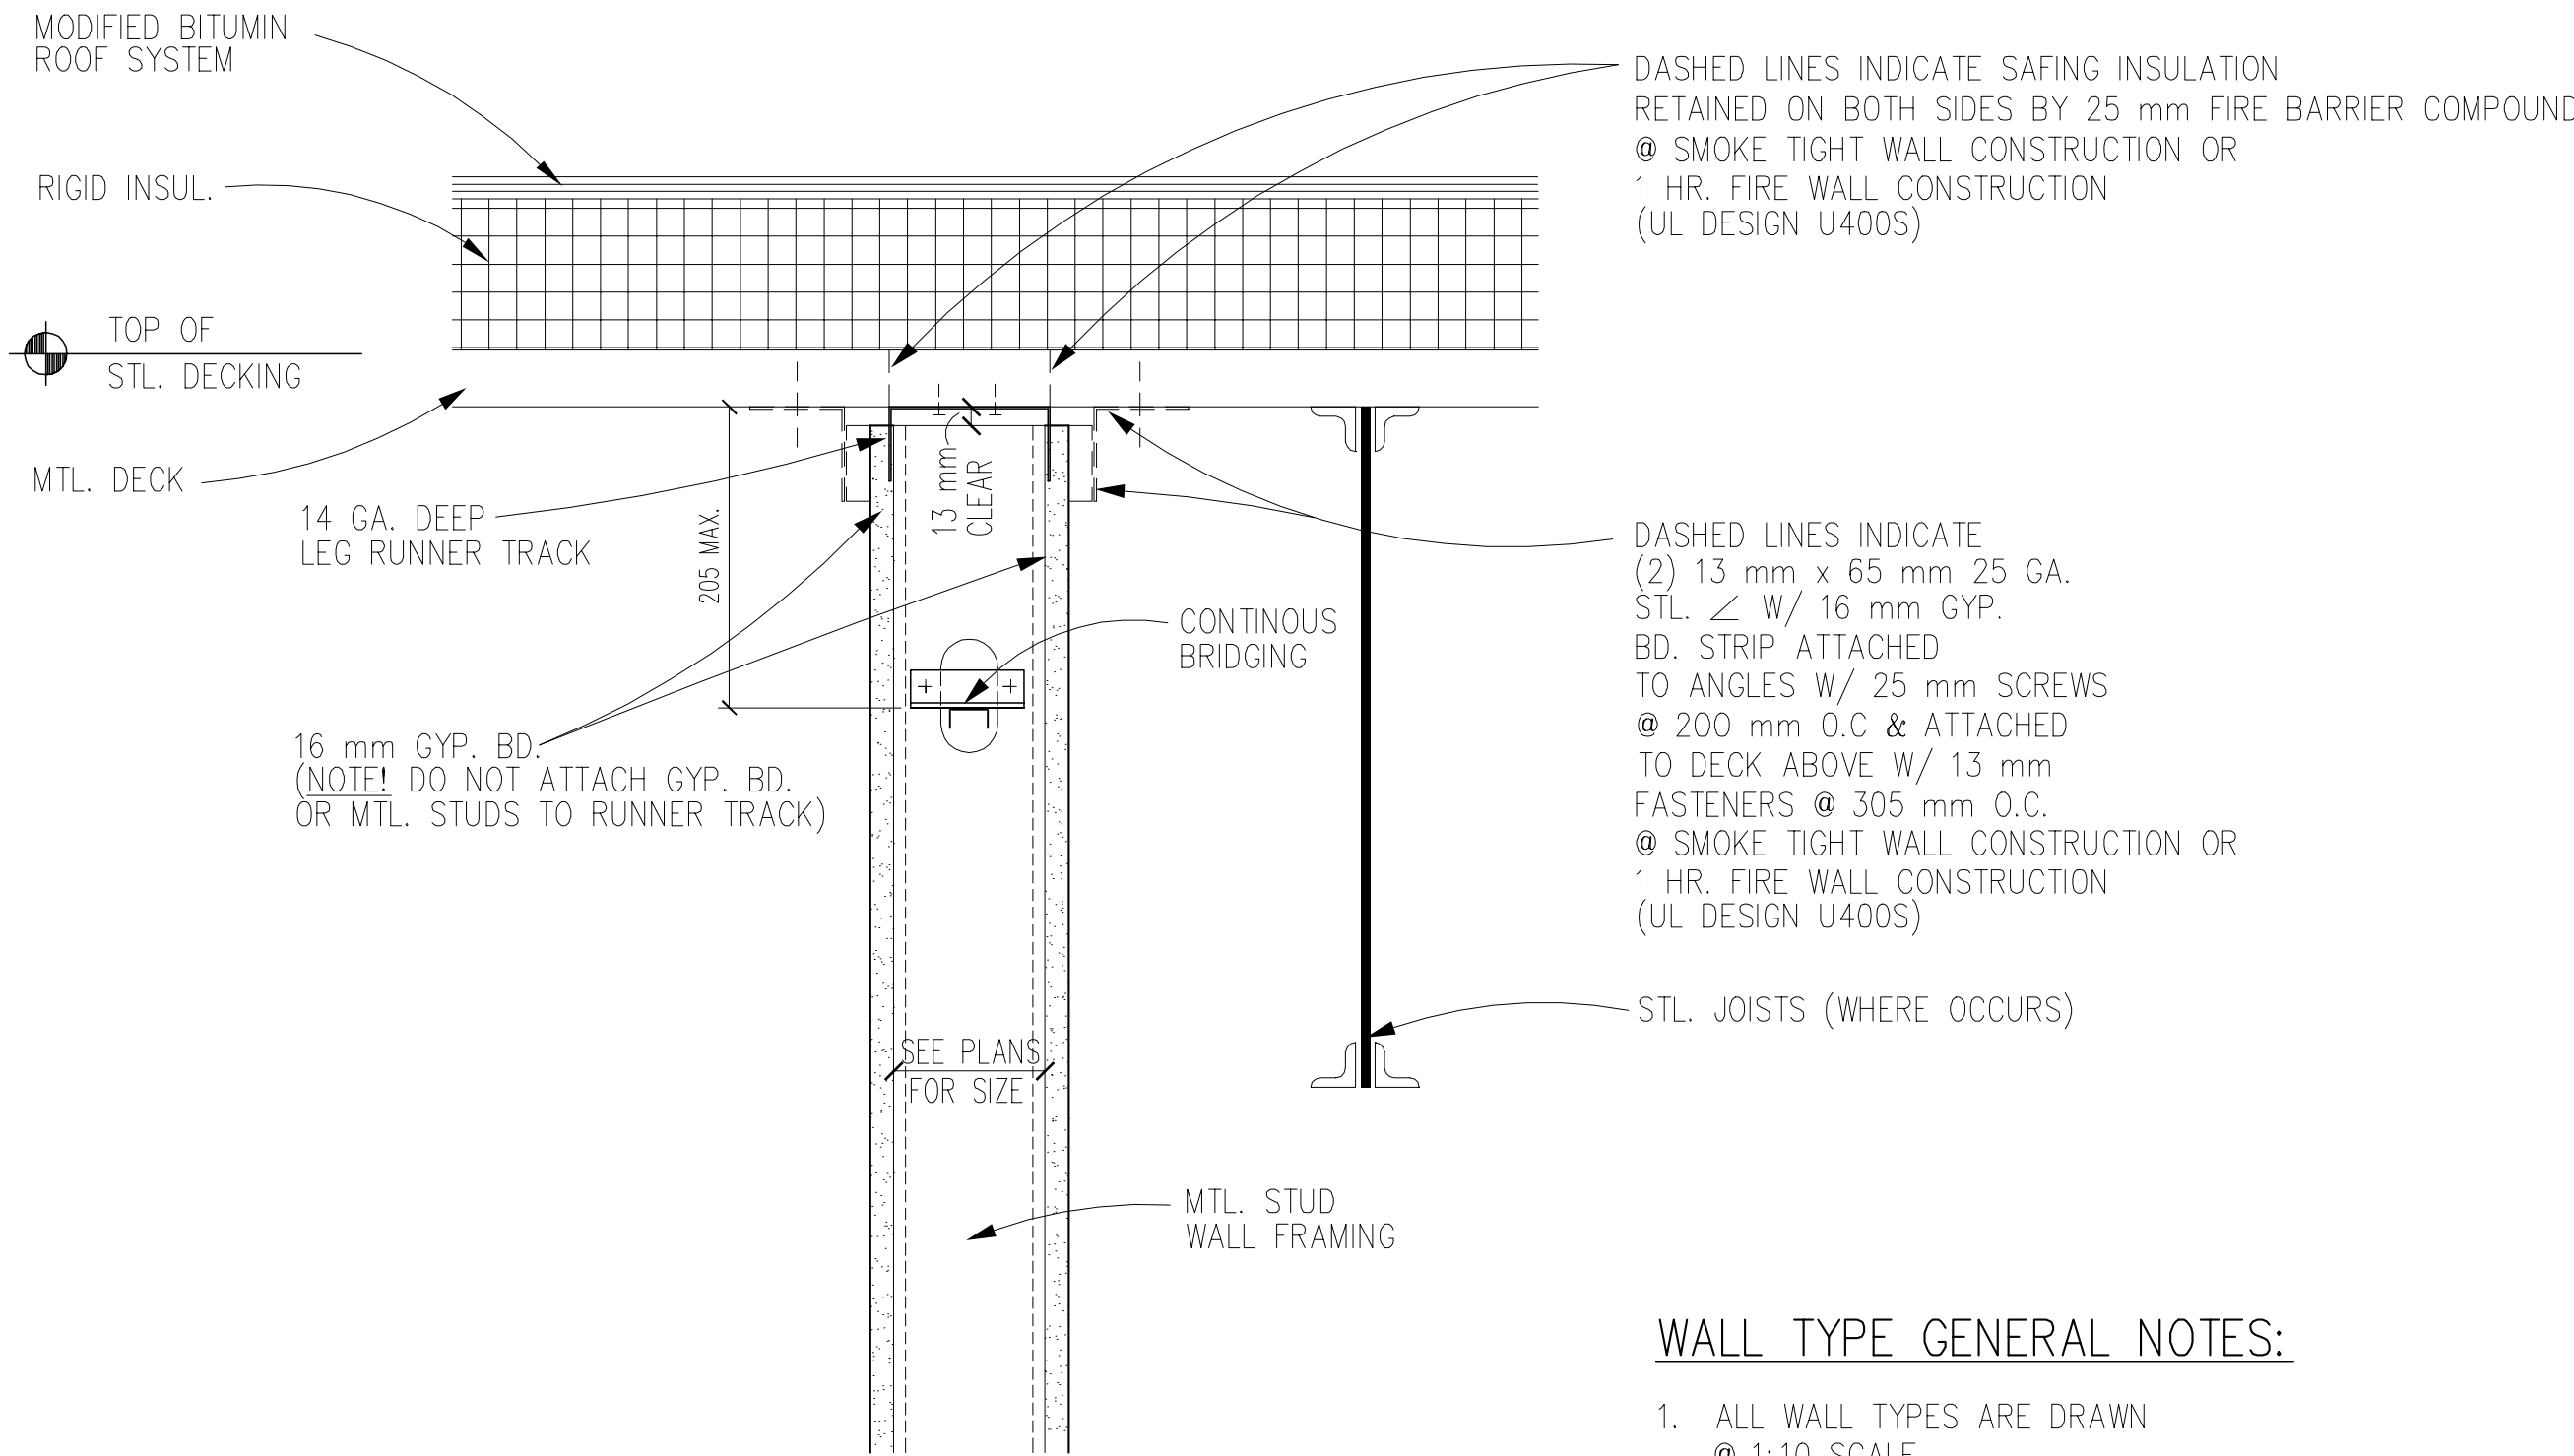

TYPICAL DETAIL

SCALE: 1:5

TYP. B A6-1 A6-2 A6-2

TYPICAL MTL RUNNER TRACK ANCHORAGE INFORMATION

RUNNER TRACK - (2) #10 SELF-TAPPING SCREWS TO STL. JOISTS


RUNNER TRACK - (2) #10 SELF-TAPPING SCREWS MTL. DECK W/ INSUL.

RUNNER TRACK - POWDER DRIVEN ANCHORS TO MTL. DECK W/ CONC.

TYPICAL CONTINUOUS BRIDGING DETAIL

SCALE: 1:5

TYP. 2 A5-4 A6-2 A6-3




WALL TYPE GENERAL NOTES:

- ALL WALL TYPES ARE DRAWN @ 1:10 SCALE.
- FINISHES SHOWN ON WALL TYPES ARE NOT NECESSARILY THE FINISHES REQUIRED AT INDICATED LOCATIONS ON PLANS. THESE DETAILS ARE FOR THE BASIC CONSTRUCTION ONLY. CONTRACTOR SHALL USE FINISHES AS INDICATED ON FINISH SCHEDULE FOR VARIED CONDITIONS.
- WHERE MGT CERAMIC TILE IS SCHEDULED AS A WALL FINISH, THE TILE SHALL BE INSTALLED ON 13 mm CEMENTITIOUS BACKER BOARD.
- ALL ONE HOUR FIRE AND/OR SMOKE WALLS SHALL EXTEND TO UNDERSIDE OF STRUCTURAL SYSTEM ABOVE AND ANCHOR AS INDICATED. CAULK AND SEAL PROPERLY AROUND ALL DUCTS, PIPES, ETC. PENETRATING WALLS TO MAINTAIN INTEGRITY OF INDICATED RATING AND/OR THE REQUIRED SMOKE RESISTANCE. (USE U.L. APPROVED RATED FIRE CAULK)
- SEE DETAILS FOR WALL REINFORCING FOR GRAB BARS, CHAIR RAILS, BUMPERRAILS, CASEWORK, ETC. ON SHEETS A6-3, A6-4 & A13-1.
- WHERE LGC IS SCHEDULED IN TOILETS, "GWB" SHALL BE MOISTURE RESISTANT GYP. BOARD.
- CAULKING BEADS AT BOTTOM OF GYPSUM WALL BOARD SHALL BE MINIMUM 2 (TWO) CONTINUOUS BEADS EACH SIDE.
- PROVIDE ACOUSTICAL SEALANT AROUND PERIMETER OF ALL WALL PENETRATIONS BELOW HIGHEST CEILING ON EITHER SIDE OF WALL.
- FIRE RATING SHOWN ON THIS DRAWING INDICATES THE FIRE RESISTANCE CAPABILITY OF A PARTICULAR WALL CONSTRUCTION. THE ACTUAL LOCATION OF FIRE AND SMOKE PARTITIONS IS SHOWN BY FIRE & SMOKE SYMBOLS ON THE FLOOR PLANS.
- WHERE VIEW PANELS OR STOREFRONTS ARE INDICATED TO OCCUR IN PARTITIONS, PARTITION SHALL EXTEND ABOVE AND/OR BELOW STOREFRONT IN ACCORDANCE W/ PARTITION CONSTRUCTION SHOWN. SEE DRAWINGS FOR LOCATION AND DETAIL OF STOREFRONTS & VIEW PANELS.
- EXIT ENCLOSURES AND FIRE WALLS (SEE NOTE 10) SHALL BE EFFECTIVELY AND PERMANENTLY IDENTIFIED WITH STENCILING IN 50 mm H. LETTERS APPROVED BY THE ARCHITECT. IDENTIFICATION SHALL BE ABOVE THE FINISHED CEILING IN SPACES VISIBLE TO THE EYE. SUGGESTED WORDING:
"1 HR. FIRE WALL"
"PROTECT ALL OPENINGS."
SPACING AT 1830 mm O.C. OR AS DIRECTED BY THE CONTRACTING OFFICER.

IF SHEET IS LESS THAN 28"x42", IT IS A REDUCED PRINT. SCALE REDUCED ACCORDINGLY.

A6-2



MEDICAL/DENTAL CLINIC

WALL TYPES & DETAILS

SIZE	CODE IDENT. NO.	DRAWING NO.
F	XXXXX	8144592
SCALE: AS SHOWN	CONST. CONTR. NO.	SHEET 87 OF 316