REVISIONS				
SYM	DESCRIPTION	PREPARED BY	DATE	APPROVED

NURSE CALL SYSTEM:

1. MOUNTING HEIGHTS OF NURSE CALL SYSTEM DEVICES ABOVE FINISHED FLOOR SHALL BE AS FOLLOWS UNLESS NOTED OTHERWISE (MOUNTING HEIGHTS ARE TO CENTERLINE OF DEVICE, EXCEPT WHERE NOTED):

LAVATORY STATION 800mm
EMERGENCY STATION 1291mm
DUTY OR STAFF STATION 1371mm
MASTER STATION (WALL) .....1676mm TO TOP OF DISPLAY

2. ANNUNCIATES ALL NURSE CALL STATIONS IN BLOCKS 2A & 2C.

3. ALL CONDUIT TO BE 21mm MINIMUM.

4. ALL TERMINAL CABINETS SHALL BE STEEL, NEMA 1, STEEL HINGED DOOR, WITH FIRE PROOF PAINTED WOOD BACKBOARD AND BARRIER TYPE TERMINAL STRIPS.

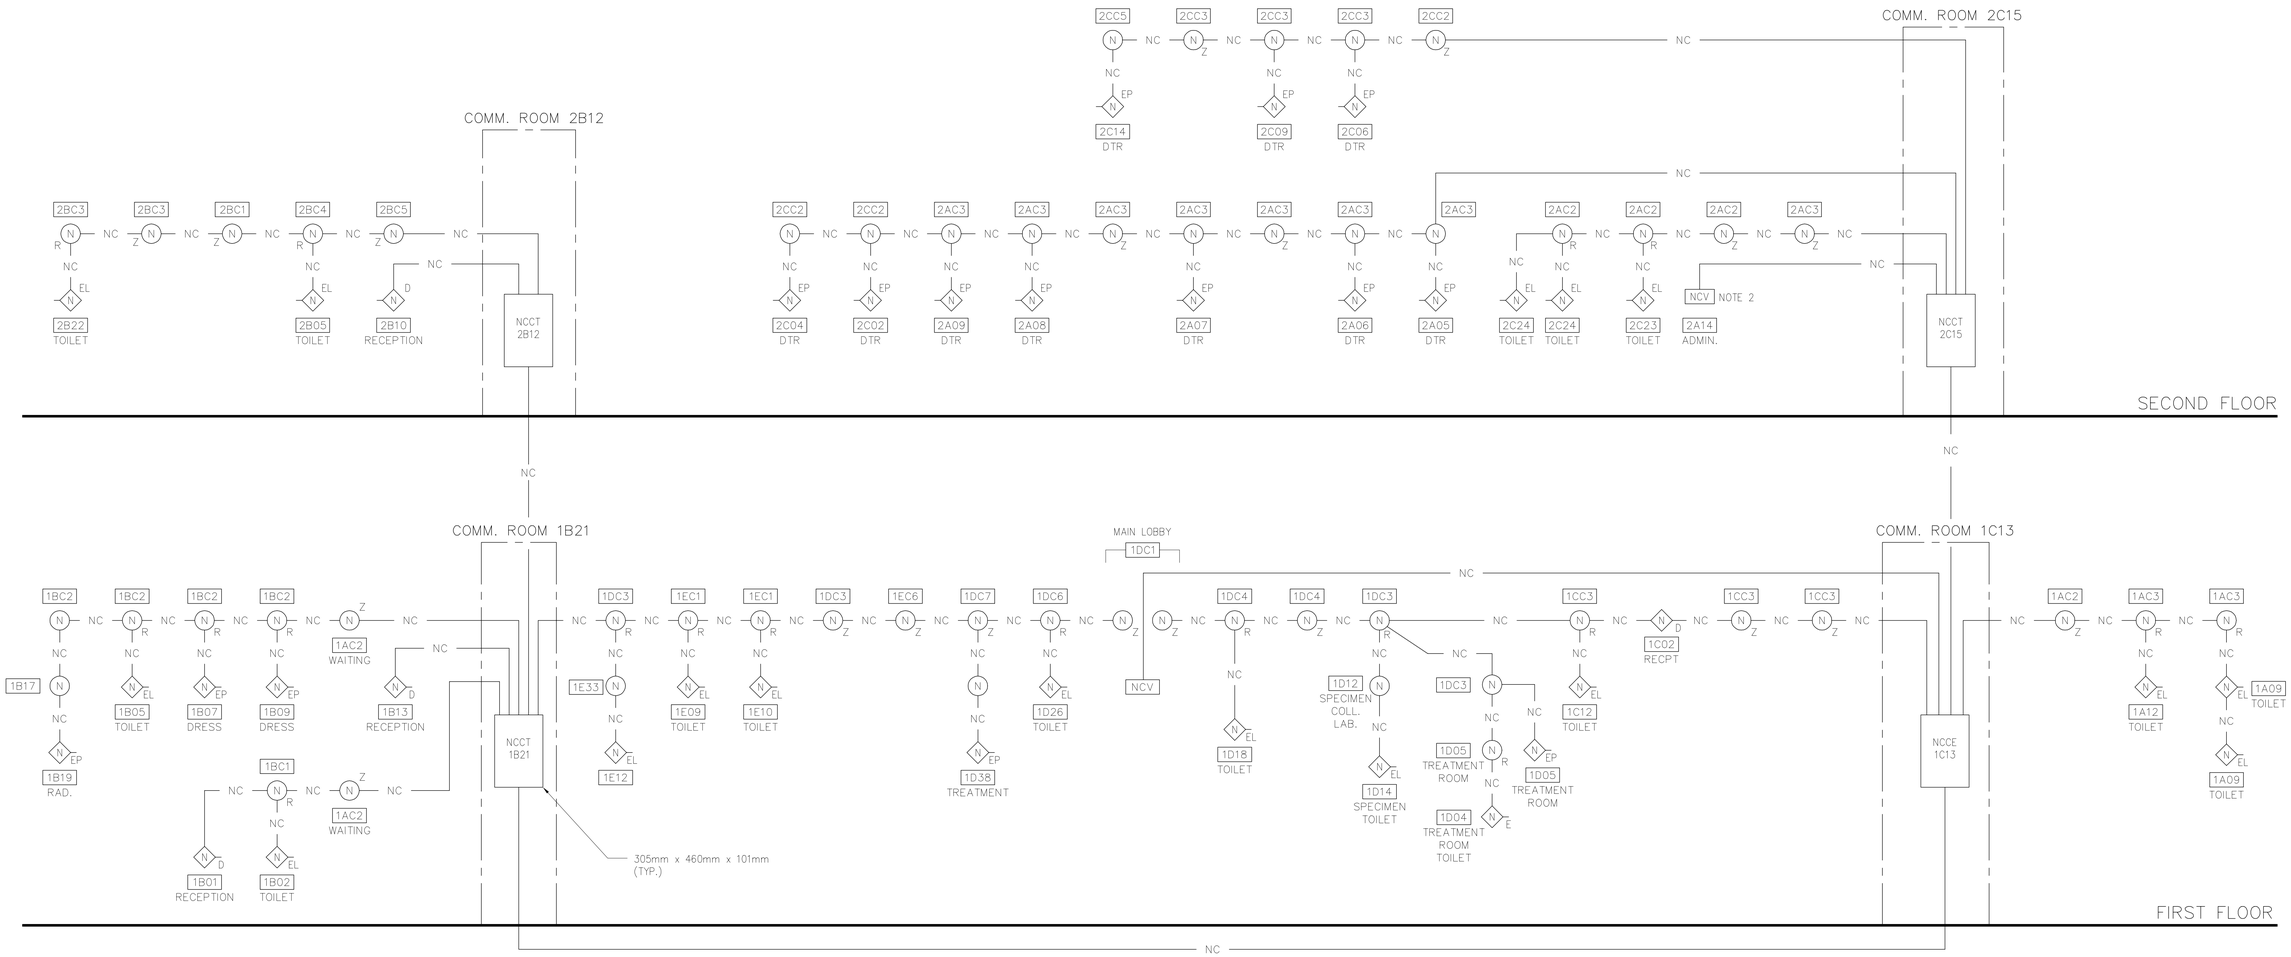

TONE/VISUAL NURSE CALL SYSTEM SINGLE LINE DIAGRAM

NO SCALE

IF SHEET IS LESS THAN 28"X42", IT IS A REDUCED PRINT. SCALE REDUCED ACCORDINGLY.

EC8-1

[redacted]

MEDICAL/DENTAL [redacted]

TONE/VISUAL NURSE CALL SYSTEM – SINGLE LINE DIAGRAM

SIZE	CODE IDENT. NO.	[redacted] DRAWING NO.
F	XXXXX	8144816
		CONST. CONTR. NO. [redacted]
SCALE: AS SHOWN	SPEC. 11996048	SHEET 311 OF 316