REVISIONS				
SYM	DESCRIPTION	PREPARED BY	DATE	APPROVED

PLAN LEGEND

- NEW WALL CONSTRUCTION (SEE PLAN FOR SIZE)
- SMOKE TIGHT WALL CONSTRUCTION (SEE PLAN FOR SIZE)
- 1 HR FIRE WALL CONSTRUCTION (SEE PLAN FOR SIZE)
- LEAD LINE WALL SYMBOL (SEE FLOOR PLANS WHERE OCCURS)
- CR or BR — CORRIDOR OR BUMPER RAIL SYMBOL (REFER TO DETAIL(S) ON SHT. A6–5)
- DIMENSIONED FACE OF STUD TO FACE OF STUD (TYP.)
- DIMENSIONED TO FINISH FACE (TYP.)
- COLUMN WITH GYP. BD CASING (SEE A6 SERIES DRAWINGS)
- 1A–1 — ROOM NUMBER SYMBOL (REFER TO FIN. SCHED. ON A4 SERIES DRAWINGS)
- 1A–1 — DOOR NUMBER SYMBOL (REFER TO DOOR SCHED. ON A5 SERIES DRAWINGS)
- A1–1 | A1–1 — TYPICAL INTERIOR ELEVATION SYMBOL (REFER TO FLOOR PLANS WHERE OCCURS)
- VP–1 — INTERIOR VIEW PANEL TYPE SYMBOL (REFER TO VIEW PANEL SCHED. ON A5 SERIES DRAWINGS)
- 1 — INTERIOR WALL TYPE SYMBOL (REFER TO WALL TYPE SCHED. ON A6 SERIES DRAWINGS)
- W1 — EXTERIOR WINDOW TYPE SYMBOL (REFER TO EXTERIOR WINDOW SCHED. ON A9 SERIES DRAWINGS)
- L1 — EXTERIOR LOUVER TYPE SYMBOL (REFER TO EXTERIOR LOUVER SCHED. ON A10 SERIES DRAWINGS)
- A1000 — JSN NUMBER SYMBOL (REFER TO EQUIPMENT SCHED. ON A3 SERIES DRAWINGS)
- CG1, CG2 — CORNER GUARDS (REFER TO A6 SERIES DRAWINGS)
- F.E.C. — FIRE EXTINGUISHER CABINET (REFER TO FLOOR PLANS WHERE OCCURS)

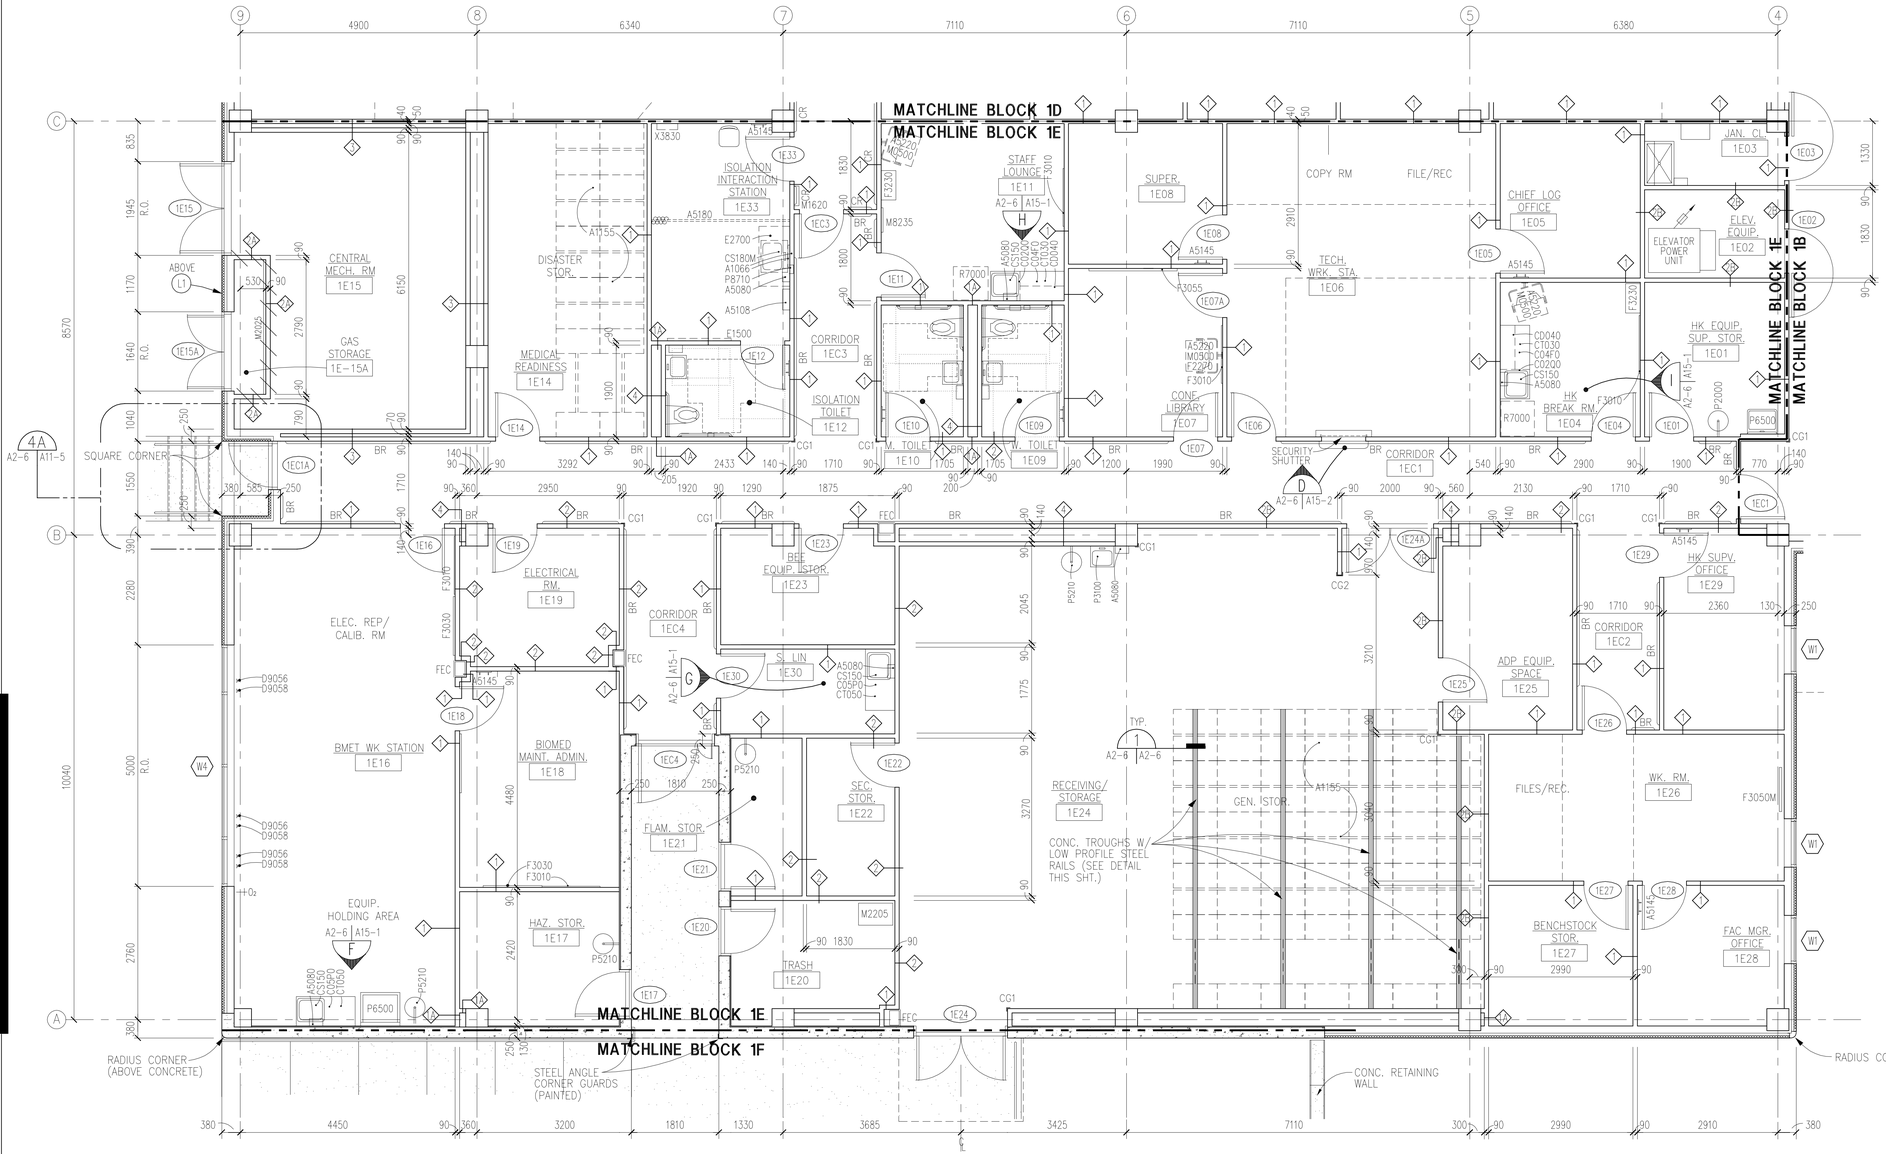



1ST FLOOR BLOCK 1E
KEY PLAN

FIRST FLOOR PLAN BLOCK 1E

SCALE: 1:50

GRAPHIC SCALE 0 500 1000 2000 4000 — 1 : 50

NOTE:
SIZE, LOCATION, NUMBER & SPACING OF CONC. TROUGHS WHERE LOW PROFILE STEEL RAILS ARE TO BE LOCATED SHALL BE COORDINATED W/ THE GOVERNMENT UPON FINAL SELECTION OF EQUIPMENT BY THE GOVERNMENT.

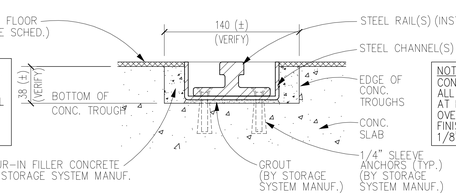

LOW PROFILE STEEL RAIL DETAIL (@ RECEIVING/STORAGE 1E24)

SCALE: 1:2 — 1 A2–6 | A2–6

NOTE 1
CONTRACTOR SHALL NOTE THAT ALL TROUGH SIDES, BOTTOMS & SURFACE AT EDGE OF TROUGH MUST BE TRUE TO 1/4" OVER 20'–0" SPAN (NON–ACCUMULATIVE). FINISHED SLAB MUST MAINTAIN NO MORE THAN 1/8" OVER 20'–0" OUT OF LEVEL IN ALL DIRECTIONS.

NOTE:
SEE DETAIL 4/A8–16 FOR OUTSIDE BUILDING CORNERS INDICATED AS "RADIUS" CORNER. SEE DETAIL 5/A8–16 FOR CORNERS INDICATED AS "SQUARE CORNERS"

NOTE!
REFER TO SHT. A13–2 FOR ENLARGED WET AREAS & TOILET PLANS.

IF SHEET IS LESS THAN 28"X42", IT IS A REDUCED PRINT. SCALE REDUCED ACCORDINGLY.

A2-6

[redacted]

MEDICAL/DENTAL CLINIC [redacted]

FIRST FLOOR PLAN BLOCK 1E

SIZE	CODE IDENT. NO.	DRAWING NO.
F	XXXXX	[redacted] 8144562
		CONST. CONTR. NO. [redacted]
SCALE: AS SHOWN	SPEC. 11996048	SHEET 57 OF 316